


PROLINK COMPUTER, INC. MVGA-ALPINEPCI+

Category	Video/hard drive controller
Video Types Supported	XVGA
Video Processor	Cirrus Logic, Inc.
Highest Resolution Supported	1280 x 1024
Data Bus Type	PCI
Memory Type	DRAM
Maximum Onboard Memory	2MB

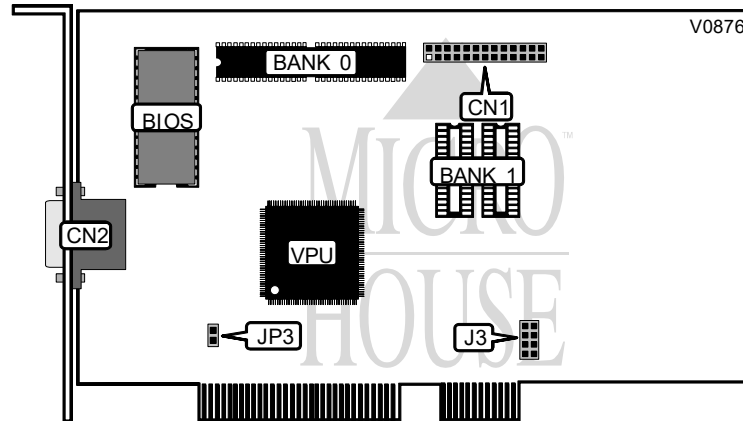


CONNECTIONS			
Purpose	Location	Purpose	Location
VESA feature connector	CN1	40-pin IDE (AT) interface connector A	J1
15-pin analog video port	CN2	40-pin IDE (AT) interface connector B	J2
IDE daughter board connector	J3	2-pin connector - drive 0,1 active LED	JP1
		2-pin connector - drive 2,3 active LED	JP15

IRQ9	
Setting	JP3
Disabled	Open
Enabled	Closed

DRAM CONFIGURATION		
Size	Bank 0	Bank 1
1MB	(2) 512K x 8	None
2MB	(2) 512K x 8	(2) 512K x 8

Continued on next page. . .



OPTIONAL IDE CONTROLLER DAUGHTER CARD

IDE INTERRUPT SELECT				
IRQ	JP2	JP4	JP5	JP6
í INTA	Open	Open	Open	Closed
INTB	Open	Open	Closed	Open
INTC	Open	Closed	Open	Open
INTD	Closed	Open	Open	Open

IDE PORTS	
Setting	JP12
í Disabled	Pins 2 & 3 closed
Enabled	Pins 1 & 2 closed

MISCELLANEOUS TECHNICAL NOTES
The functions and settings of jumpers JP7-JP11, JP13 and JP14 are not specified in manufacturer's documentation.