


DTK COMPUTER, INC.
PTI-223CL

Category	Video
Video Types Supported	XVGA
Video Processor	Trident Microsystems, Inc.
Highest Resolution Supported	1024 x 768
Data Bus Type	16-bit ISA
Memory Type	DRAM
Maximum Onboard Memory	1MB

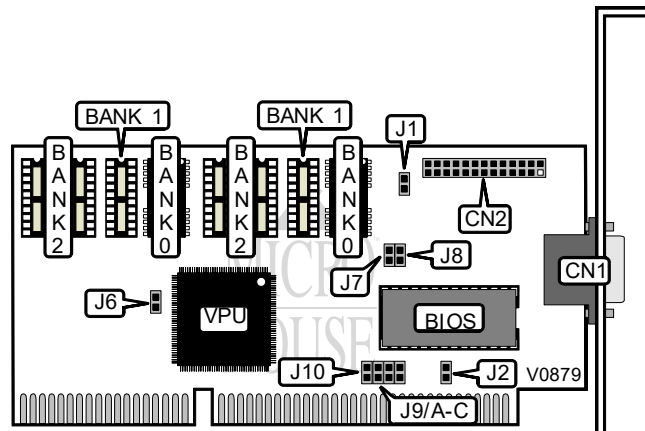

CONNECTIONS			
Purpose :	Location	Purpose :	Location
15-pin analog video port	CN1	VESA feature connector	CN2

ZERO WAIT STATE			
First Stage	Second Stage	J1	J2
if Enabled	Enabled	Open	Closed
Disabled	Enabled	Open	Open
Disabled	Disabled	Closed	Open

SCAN RATE	
Setting	J7
if Interlaced mode	Closed
Non-interlaced, 48.7KHz mode	Open

8/16-BIT BIOS AUTODETECT FUNCTION	
Setting	J8
if Enabled	Open
Disabled (boot-up in default BIOS setting)	Closed

Continued on next page...

DTK COMPUTER, INC.
PTI-223CL

...continued from previous page

8/16-BIT BUS SLOT INSTALLATION					
Setting	J6	J9/jumper A	J9/jumper B	J9/jumper C	J10
16-bit slot	Open	Open	Open	Open	Closed
8-bit slot	Closed	Closed	Closed	Closed	Open

DRAM CONFIGURATION			
Size	Bank 0	Bank 1	Bank 2
256KB	(2) 256K x 4	None	None
512KB	(2) 256K x 4	(2) 256K x 4	None
1MB	(2) 256K x 4	(2) 256K x 4	(4) 256K x 4