


DIAMOND MULTIMEDIA SYSTEMS, INC. STEALTH (VRAM)

Category	Video
Video Types Supported	XVGA
Video Processor	Unidentified
Highest Resolution Supported	1280 x 1024
Data Bus Type	16-bit ISA
Memory Type	VRAM
Maximum Onboard Memory	1MB

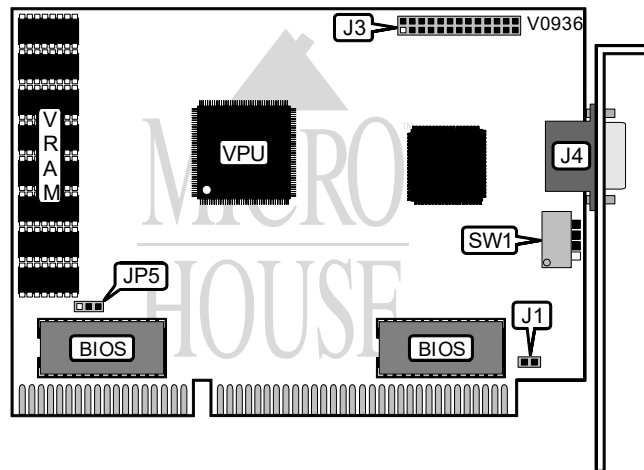

CONNECTIONS			
Purpose	Location	Purpose	Location
15-pin analog video port	J4	VGA feature connector	J3

POWER UP MONITOR CONFIGURATION		
Monitor	SW1/2	SW1/3
IBM 8514	On	On
NEC 2A	On	On
NEC 3D	Off	On
NEC 4D/5D	Off	Off
MAG 1448	On	Off
Note: The NEC 2A does not support 1024 x 768 resolutions.		

ALTERNATE TIMING CONFIGURATION	
Setting	SW1/3
Enabled	On
Disabled	Off

Continued on next page...

DIAMOND MULTIMEDIA SYSTEMS, INC.
STEALTH (VRAM)

...continued from previous page

TURBO BIOS CONFIGURATION	
Setting	SW1/4
í Enabled	On
Disabled	Off

INTERRUPT CONFIGURATION	
IRQ 2	J1
í Enabled	Closed
Disabled	Open

VRAM JUMPER CONFIGURATION	
Setting	JP5
1MB	Pins 1 & 2 closed
512KB	Pins 2 & 3 closed

VRAM CONFIGURATION		
VRAM	Bank 0/Ba k 1	Bank 0/Ba k 1
512KB	(4) 256K x 4	NONE
1MB	(4) 256K x 4	(4) 256K x 4
Note: Relative location of Bank 0 and Bank 1 is unidentified.		