


PROLINK COMPUTER, INC.
MVGA-AVGA3, MVGA-AVGA3M

Category	Video
Video Types Supported	XVGA
Video Processor	CL-GD542X
Highest Resolution Supported	1280 x 1024
Data Bus Type	16-bit ISA
Memory Type	DRAM
Maximum Onboard Memory	2MB

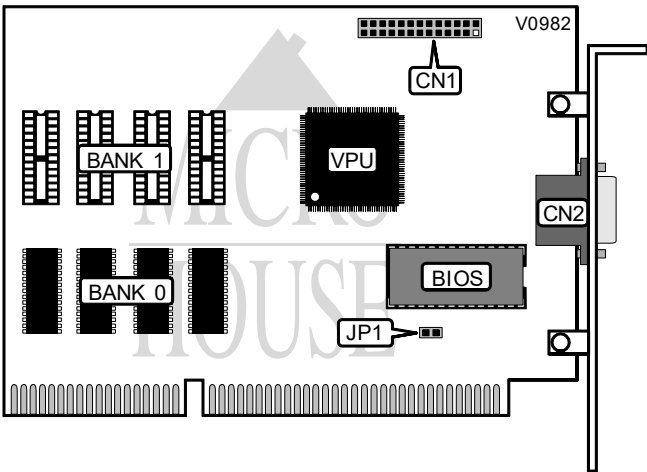

CONNECTIONS			
Purpose	Location	Purpose	Location
VGA feature connector	CN1	15-pin analog video port	CN2

ZERO WAIT-STATE CONFIGURATION	
Setting	JP1
Zero wait-state	Closed
Non-Zero wait-state	Open

DRAM CONFIGURATION		
Size	Bank 1	Bank 2
1MB	(4) 256K x 8	NONE
2MB	(4) 256K x 8	(4) 256K x 8