


SIIG, INC.  
I/O EXPANDER 2 S

Card Type	Serial card
Chipset Controller	16550
I/O Options	Serial ports (2)
Maximum DRAM	N/A

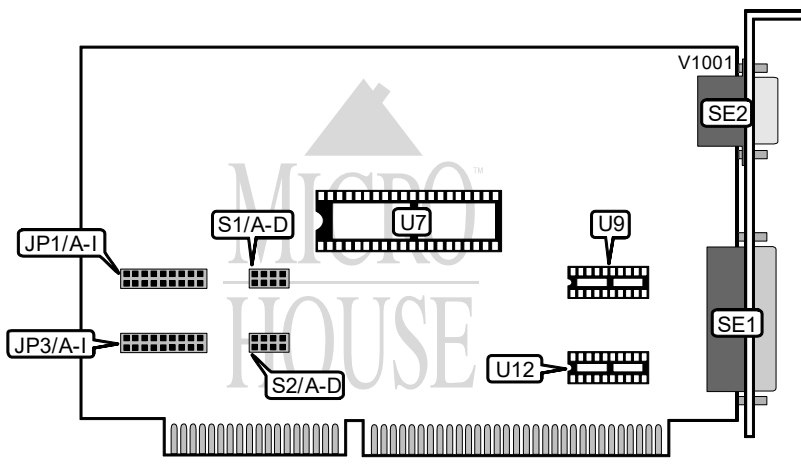

CONNECTIONS			
Purpose	Location	Purpose	Location
25-pin serial port	SE1	9-pin serial port	SE2

SERIAL PORT 1 CONFIGURATION				
COM	S2/A	S2/B	S2/C	S2/D
COM1 (3F8h-3FFh)	Open	Open	Open	Closed
COM2 (2F8h-2FFh)	Open	Open	Closed	Open
COM3 (3E8h-3EFh)	Open	Closed	Open	Open
COM4 (2E8h-2EFh)	Closed	Open	Open	Open
Disabled	Open	Open	Open	Open

Continued next page...

SIIG, INC.  
I/O EXPANDER 2 S

... continued from previous page.

SERIAL PORT 1 INTERRUPT SELECTION									
IRQ	JP3/A	JP3/B	JP3/C	JP3/D	JP3/E	JP3/F	JP3/G	JP3/H	JP3/I
4	Open	Closed	Open	Open	Open	Open	Open	Open	Open
2/9	Open	Open	Open	Open	Closed	Open	Open	Open	Open
3	Closed	Open	Open	Open	Open	Open	Open	Open	Open
5	Open	Open	Closed	Open	Open	Open	Open	Open	Open
7	Open	Open	Open	Closed	Open	Open	Open	Open	Open
10	Open	Open	Open	Open	Open	Closed	Open	Open	Open
11	Open	Open	Open	Open	Open	Open	Closed	Open	Open
12	Open	Open	Open	Open	Open	Open	Open	Closed	Open
15	Open	Open	Open	Open	Open	Open	Open	Open	Closed
Disabled	Open	Open	Open	Open	Open	Open	Open	Open	Open

SERIAL PORT 2 CONFIGURATION				
COM	S1/A	S1/B	S1/C	S1/D
COM2 (2F8h-2FFh)	Open	Open	Closed	Open
COM1 (3F8h-3FFh)	Open	Open	Open	Closed
COM3 (3E8h-3EFh)	Open	Closed	Open	Open
COM4 (2E8h-2EFh)	Closed	Open	Open	Open
Disabled	Open	Open	Open	Open

SERIAL PORT 2 INTERRUPT SELECTION									
IRQ	JP1/A	JP1/B	JP1/C	JP1/D	JP1/E	JP1/F	JP1/G	JP1/H	JP1/I
3	Closed	Open	Open	Open	Open	Open	Open	Open	Open
2/9	Open	Open	Open	Open	Closed	Open	Open	Open	Open
4	Open	Closed	Open	Open	Open	Open	Open	Open	Open
5	Open	Open	Closed	Open	Open	Open	Open	Open	Open
7	Open	Open	Open	Closed	Open	Open	Open	Open	Open
10	Open	Open	Open	Open	Open	Closed	Open	Open	Open
11	Open	Open	Open	Open	Open	Open	Closed	Open	Open
12	Open	Open	Open	Open	Open	Open	Open	Closed	Open
15	Open	Open	Open	Open	Open	Open	Open	Open	Closed
Disabled	Open	Open	Open	Open	Open	Open	Open	Open	Open

SERIAL PORT 2 ACTIVATION	
Chip	Socket
16550	U7
1489	U9
1488	U12
Note: To activate serial port 2 upgrade chips must be installed.	