


VIDEOLOGIC, INC.
MEDIASPACE

Category	Video
Video Types Supported	XVGA
Video Processor	Unidentified
Highest Resolution Supported	N/A
Data Bus Type	16-bit ISA
Memory Type	N/A
Maximum Onboard Memory	N/A

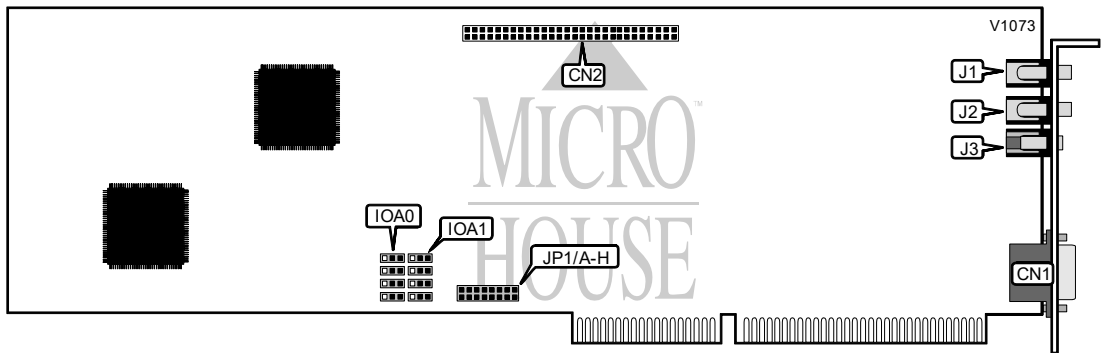

CONNECTIONS			
Purpose :	Location	Purpose :	Location
15-pin analog video port	CN1	Analog audio out	J2
56-pin media bus connector	CN2	Optical audio in	J3
Analog audio in	J1		

BASE ADDRESS SELECTION		
Address	IOA0	IOA1
300h	Pins 1 & 2 closed	Pins 1 & 2 closed
310h	Pins 1 & 2 closed	Pins 2 & 3 closed
320h	Pins 2 & 3 closed	Pins 1 & 2 closed
330h	Pins 2 & 3 closed	Pins 2 & 3 closed

INTERRUPT SELECTION								
IRQ	JP1/A	JP1/B	JP1/C	JP1/D	JP1/E	JP1/F	JP1/G	JP1/H
15	Open	Open	Open	Open	Open	Open	Open	Closed
3	Closed	Open	Open	Open	Open	Open	Open	Open
4	Open	Closed	Open	Open	Open	Open	Open	Open
5	Open	Open	Closed	Open	Open	Open	Open	Open
7	Open	Open	Open	Closed	Open	Open	Open	Open
10	Open	Open	Open	Open	Closed	Open	Open	Open
11	Open	Open	Open	Open	Open	Closed	Open	Open
12	Open	Open	Open	Open	Open	Open	Closed	Open

Continued on next page. . .

VIDEOLOGIC, INC.
MEDIASPACE

. . .continued from previous page

MISCELLANEOUS TECHNICAL NOTE

The MEDIASPACE video capture board works in conjunction with the DVA-4000 PC AT (V1074) and PS/2 (V1075) boards.