


# SIGMA DESIGNS, INC.

## REAL MAGIC RAVE

Category	Video/MPEG
Video Types Supported	XVGA
Video Processor	Unidentified
Highest Resolution Supported	1024 x 768
Data Bus Type	32-bit VESA Local Bus
Memory Type	N/A
Maximum Onboard Memory	N/A

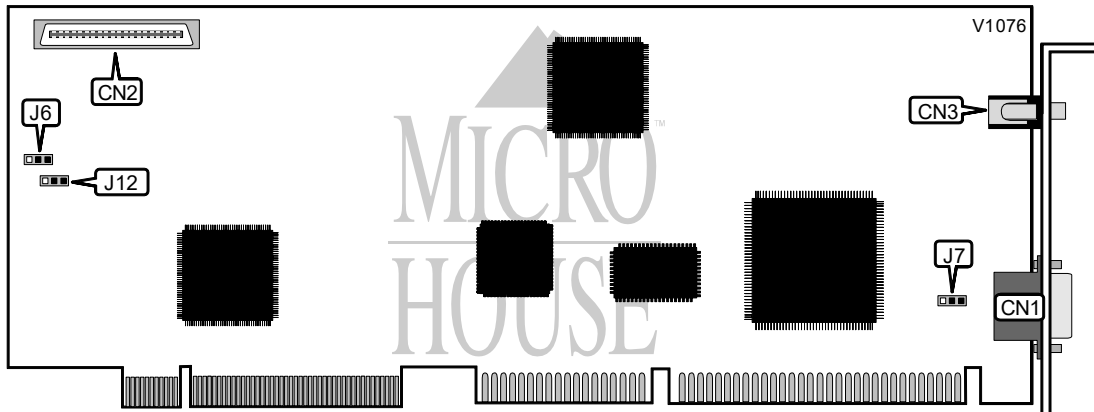

CONNECTIONS			
Purpose	Location	Purpose	Location
15-pin analog video port	CN1	Stereo audio line out	CN3
VESA advanced feature connector	CN2		

VL-BUS SPEED SELECTION	
Speed	J6
if $\leq 33\text{MHz}$	Pins 1 & 2 closed
$> 33\text{MHz}$	Pins 2 & 3 closed

VERTICAL SYNC INTERRUPT (IRQ9) CONFIGURATION	
Setting	J7
if Disabled	Pins 1 & 2 closed
Enabled	Pins 2 & 3 closed

VL-BUS WAIT STATE CONFIGURATION	
Setting	J12
if Non-Zero wait-state	Pins 2 & 3 closed
Zero wait-state	Pins 1 & 2 closed