


ZYXEL COMMUNICATIONS CORPORATION

U-1496B/U-1496B+

Modem Type	Data (synchronous/asynchronous)/Fax/Voice
Maximum Data Rate	19.2Kbps
Maximum Fax Rate	14.4Kbps
Data Bus	8-bit ISA
Fax Class	Class I & II
Data Modulation Protocol	Bell 103A/212A ITU-T V.21, V.22, V.22bis, V.23, V.26bis, V.27bis, V.29, V.32, V.32bis, V.33 ZyXEL 16.8Kbps, 19.2Kbps, ZyCELL 4800bps-19.2Kbps cellular
Fax Modulation Protocol	ITU-T V.17, V.21CH2, V.27ter, V.29
Error Correction/Compression	MNP2-5, V.42, V.42bis

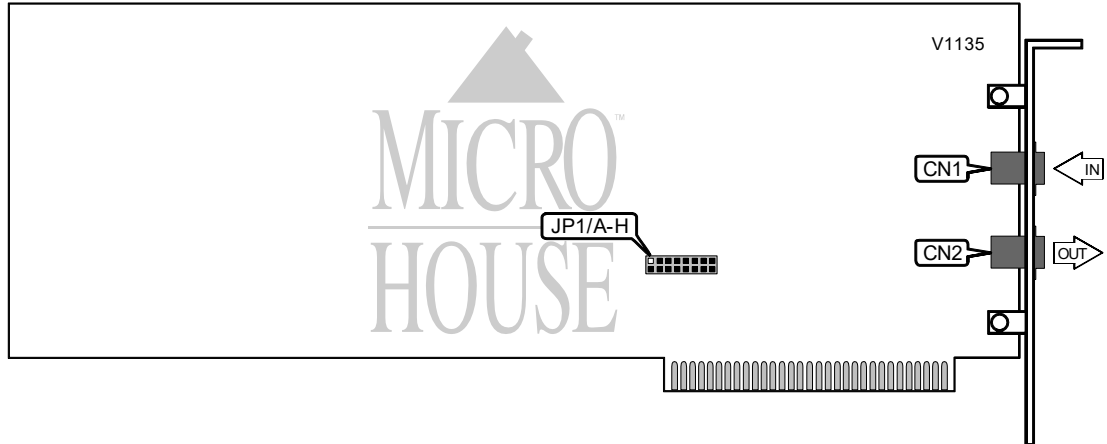

CONNECTIONS			
Purpos	Location	Purpos	Location
Line in	CN1	Line out	CN2

BASE I/O ADDRESS SELECTION				
Address	JP1/A	JP1/B	JP1/C	JP1/D
COM1:	Closed	Open	Closed	Open
COM2:	Open	Closed	Closed	Open
COM3:	Closed	Open	Open	Closed
COM4:	Open	Closed	Open	Closed

INTERRUPT SELECTION				
IRQ	JP1/E	JP1/F	JP1/G	JP1/H
3	Closed	Open	Open	Open
4	Open	Closed	Open	Open
5	Open	Open	Closed	Open
6	Open	Open	Open	Closed

Proprietary Command Set

See document V1036 for a full command summary.