


SIIG, INC. MCGP I

Category	Video
Video Types Supported	Monochrome/CGA
Video Processor	Unidentified
Highest Resolution Supported	720 x 348
Data Bus Type	8-bit ISA
Memory Type	DRAM
Maximum Onboard Memory	64KB

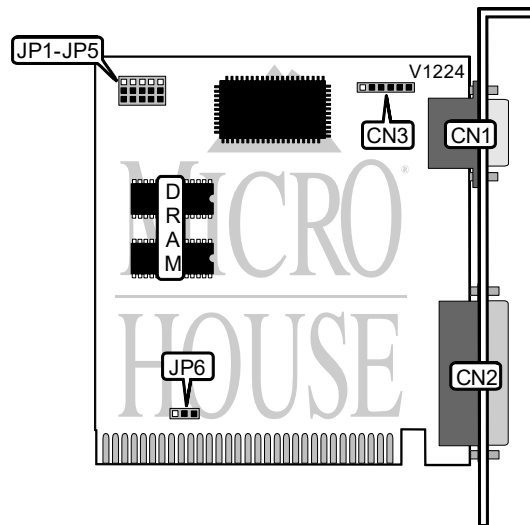

CONNECTIONS			
Purpose :	Location	Purpose :	Location
15-pin analog video port	CN1	6-pin light pen interface	CN3
25-pin parallel port connector	CN2		

DISPLAY MODE CONFIGURATION		
Mode	JP1	JP5
Monochrome	Pins 1 & 2 closed	Pins 1 & 2 closed
CGA	Pins 2 & 3 closed	Pins 1 & 2 closed

PARALLEL PORT CONFIGURATION			
Setting	I/O Address	P2	P3
Enabled	3BCh	Pins 1 & 2 closed	Pins 1 & 2 closed
Enabled	378h	Pins 1 & 2 closed	Pins 2 & 3 closed
Enabled	278h	Pins 2 & 3 closed	Pins 1 & 2 closed
Disabled	N/A	Pins 2 & 3 closed	Pins 2 & 3 closed

Continued on next page . . .

...continued from previous page

PARALLEL PORT INTERRUPT SELECTION	
IRQ	JP6
5	Pins 1 & 2 closed
7	Pins 2 & 3 closed

FONT GENERATOR SELECTION	
Setting	JP4
Use built-in character font	Pins 1 & 2 closed
Use an external character font (optional)	Pins 2 & 3 closed