
ORCHID TECHNOLOGY VIDIOLA

Category Video Types Supported Video Processor Video **XVGA**

Orchid Technology 800 x 600 16-bit ISA

Highest Resolution Supported
Data Bus Type
Memory Type
Maximum Onboard Memory N/A N/A

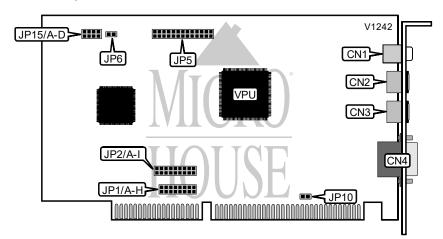

CONNECTIONS					
Purpos : Location Purpos : Location					
Composite video in	CN1	15-pin analog video port	CN4		
S-video in	CN2	VESA feature connector	JP5		
VGA in	CN3				

INTERRUPT SELECTION								
IRQ	JP1/A	JP1/B	JP1/C	JP1/D	JP1/E	JP1/F	JP1/G	JP1/H
í 10	Open	Open	Open	Open	Closed	Open	Open	Open
5	Open	Closed						
6	Open	Open	Open	Open	Open	Open	Closed	Open
7	Open	Open	Open	Open	Open	Closed	Open	Open
11	Open	Open	Open	Closed	Open	Open	Open	Open
12	Open	Open	Closed	Open	Open	Open	Open	Open
14	Open	Closed	Open	Open	Open	Open	Open	Open
15	Closed	Open						

Continued on next page . . .

ORCHID TECHNOLOGY VIDIOLA

...continued from previous page

	BASE I/O ADDRESS SELECTION								
Address	JP2/A	JP2/B	JP2/C	JP2/D	JP2/E	JP2/F	JP2/G	JP2/H	JP2/I
í 700h	Closed	Closed	Closed	Closed	Closed	Closed	Open	Open	Open
500h	Closed	Open	Closed	Closed	Closed	Closed	Open	Closed	Open
600h	Closed	Closed	Closed	Closed	Closed	Closed	Closed	Open	Open

ZERO WAIT STATE CONFIGURATION				
Setting	JP10			
í Enabled	Closed			
Disabled	Open			

VGA COMPATABILITY CONFIGURATION					
S tting	JP15/A	JP15/B	JP15/C	JP15/D	
í VGA compatibility	Closed	Open	Open	Open	
Delay clock by 1 cycle	Open	Closed	Closed	Open	
Delay clock by 2 cycles	Open	Closed	Open	Closed	

VGA CLOCK TERMINATION CONFIGURATION				
Setting	JP6			
í Enabled	Closed			
Disabled	Open			