


U.S. ROBOTICS, INC.
SPORTSTER 14,400 INTERNAL

Modem Type	Data (synchronous/asynchronous)/Fax
Maximum Data Rate	14.4Kbps
Maximum Fax Rate	14.4Kbps
Data Bus	8-bit ISA
Fax Class	Class I
Data Modulation Protocol	Bell 103A/212A
	ITU-T V.22, V.22bis, V.23, V.32, V.32bis, V.25
Fax Modulation Protocol	ITU-T V.17, V.21CH2, V.27ter, V.29
Error Correction/Compression	MNP5, V.42, V.42bis

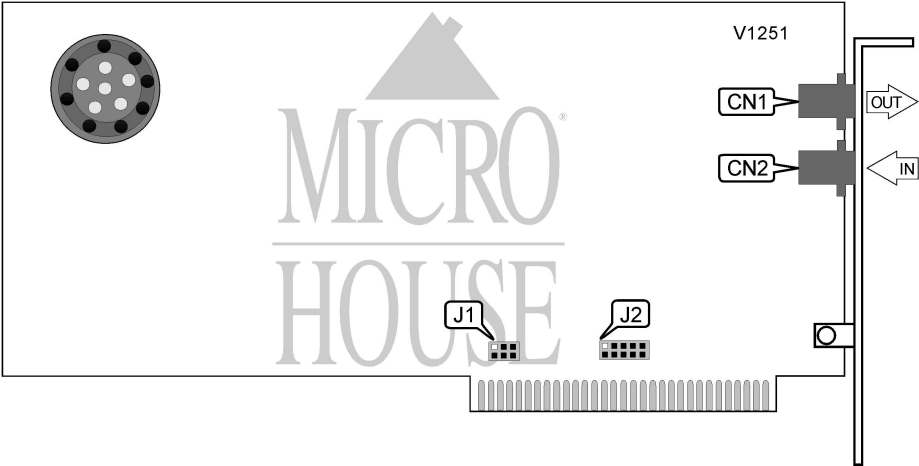

CONNECTIONS			
Purpos	Location	Purpos	Location
Line in	CN2	Line out	CN1

COM PORT SETTINGS			
COM	1/1	1/2	1/3
COM1	Closed	Closed	Closed
COM2	Open	Closed	Closed
COM3	Closed	Open	Closed
COM4	Open	Open	Closed

Continued on next page . . .

U.S. ROBOTICS, INC.
SPORTSTER 14,400 INTERNAL

...continued from previous page

INTERRUPT SELECT					
Interrupt	J2/1	J2/2	J2/3	J2/4	J2/5
IRQ2	Closed	Open	Open	Open	Open
IRQ3	Open	Closed	Open	Open	Open
IRQ4	Open	Open	Closed	Open	Open
IRQ5	Open	Open	Open	Closed	Open
IRQ7	Open	Open	Open	Open	Closed

Proprietary AT Command Set

See document V1250 for a full command summary.