


UNIDENTIFIED RTVGA

Category	Video
Video Types Supported	XVGA
Video Processor	REALTEK RTG3106
Highest Resolution Supported	1280 x 1024
Data Bus Type	16-bit ISA
Memory Type	DRAM
Maximum Onboard Memory	1MB

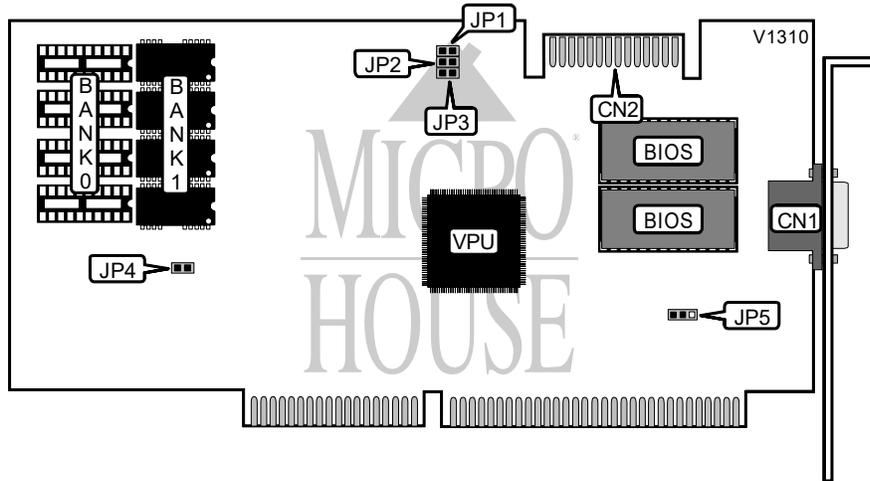

CONNECTIONS			
Purpose :	Location	Purpose :	Location
15-pin analog video port	CN1	VGA feature connector	CN2

VGA FEATURE CONNECTOR POWER CONFIGURATION	
Setting	JP1
M12 & M13 connect to Vcc. (Ground)	Closed
M12 & M13 floating (Open)	Open

BASE ADDRESS DECODING CONFIGURATION	
Setting	JP2
í Unlatched (Fast)	Open
Latched (Slow)	Closed

VGA GRAPHICS MODE CONFIGURATION	
Mode	JP3
í Interlaced	Open
Non-interlaced	Closed

Continued on next page . . .

UNIDENTIFIED
RTVGA

...continued from previous page

BUS SIZE DETECTION CONFIGURATION	
Setting	JP4
í Auto detect	Closed
8-bit	Open

INTERRUPT SELECTION	
IRQ	JP5
2/9	Pins 1 & 2 closed
7	Pins 2 & 3 closed

DRAM CONFIGURATION		
Memory	Bank 0	Bank 1
512KB	(4) 256K x 4	None
1MB	(4) 256K x 4	(4) 256K x 4