


PROLINK COMPUTER, INC. PIXELVIEW-CL5440P+

Category	Video
Video Types Supported	XVGA
Video Processor	Cirrus Logic, Inc.
Highest Resolution Supported	1280 x 1024
Data Bus Type	32-bit PCI
Memory Type	DRAM
Maximum Onboard Memory	2MB

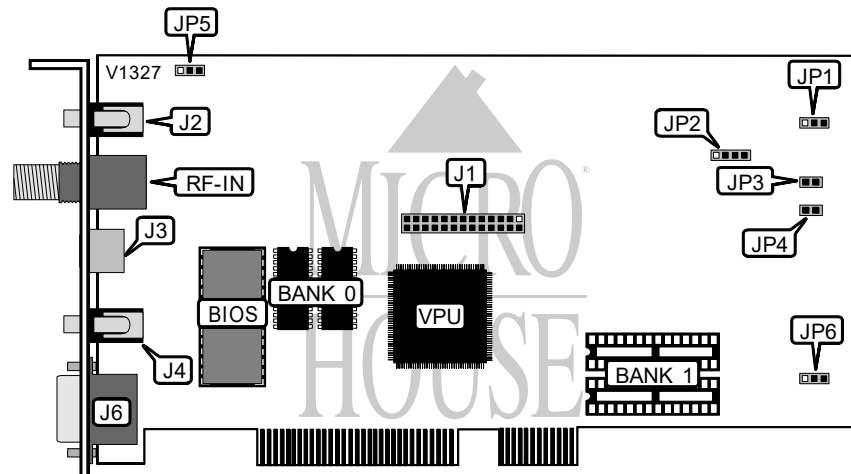

CONNECTIONS			
Purpose	Location	Purpose	Location
VGA feature connector	J1	Internal audio out	JP2
Audio out/line out	J2	External IR connector	JP5
Video in	J3	Internal IR connector	JP6
Audio in	J4	Tuner in	RF-IN
15-pin analog video port	J6		

AUDIO SOURCE CONFIGURATION	
Setting	JP1
Normal	Pins 1 & 2 closed
Select MTS	Pins 2 & 3 closed

MTS/IR I/O PORT ADDRESS SELECTION		
Address	JP3	JP4
2D0h	Closed	Closed
2D8h	Closed	Open
2E0h	Open	Closed
2E8h	Open	Open

Continued on next page . . .

PROLINK COMPUTER, INC.
PIXELVIEW-CL5440P+

...continued from previous page

DRAM CONFIGURATION		
Memory	Bank 0	Bank 1
1MB	(2) 256K x 16	None
2MB	(2) 256K x 16	(2) 256K x 16