


PROLINK COMPUTER, INC.
MVGA-CLM30P

Category	Video
Video Types Supported	XVGA
Video Processor	Cirrus Logic, Inc.
Highest Resolution Supported	1280 x 1024
Data Bus Type	32-bit PCI
Memory Type	DRAM
Maximum Onboard Memory	2MB

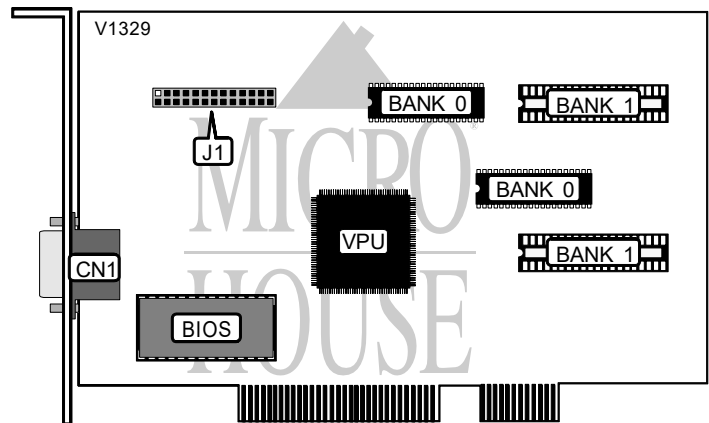

CONNECTIONS			
Purpose	Location	Purpose	Location
15-pin analog video port	CN1	VGA feature connector	J1

DRAM CONFIGURATION		
Memory	Bank 0	Bank 1
1MB	(2) 256K x 16	NONE
2MB	(2) 256K x 16	(2) 256K x 16