


# UNIDENTIFIED CT-8190

Category	Video
Video Types Supported	EGA
Video Processor	Unidentified
Highest Resolution Supported	720 x 348
Data Bus Type	8-bit ISA
Memory Type	DRAM
Maximum Onboard Memory	256KB (Memory configuration is unidentified by manufacturer)

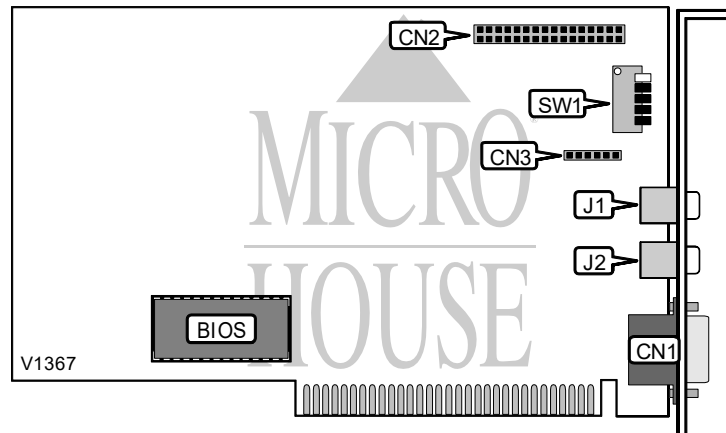

CONNECTIONS			
Purpose	Location	Purpose	Location
15-pin analog video port	CN1	Composite display - RCA jack	J1
32-pin feature connector	CN2	Composite display - RCA jack	J2
6-pin light pen connector	CN3		

PRIMARY DISPLAY ADAPTER CONFIGURATION (TABLE 1)				
Mode	SW1/1	SW1/2	SW1/3	SW1/4
Monochrome	Off	Off	On	Off
Color (40 x 25)	On	Off	Off	On
Color (80 x 25)	Off	Off	Off	On
Enhanced color (Normal color mode)	On	On	On	Off
Enhanced color (Enhanced color mode)	Off	On	On	Off

Note: These settings apply when the CT-890 display adapter is only in your system.

Continued on next page . . .

# UNIDENTIFIED

## CT-8190

...continued from previous page

PRIMARY & SECONDARY DISPLAY ADAPTER CONFIGURATION (TABLE 2)					
Primary	Secondary	SW1/1	SW1/2	SW1/3	SW1/4
Color (40 x 25)	Monochrome or NONE	On	Off	Off	On
Color (80 x 25)	Monochrome or NONE	Off	Off	Off	On
Enhanced color (Normal color mode)	Monochrome or NONE	On	On	On	Off
Enhanced color (Enhanced color mode)	Monochrome or NONE	Off	On	On	Off
Note: These settings apply when the CT-8190 & the Monochrome display adapter are both installed in your system. When the CT-8190 is the primary display adapter; & when the CT-8190 is attached to the CGA or EGA monitor.					

PRIMARY & SECONDARY DISPLAY ADAPTER CONFIGURATION (TABLE 3)					
Primary	Secondary	SW1/1	SW1/2	SW1/3	SW1/4
Color (40 x 25)	Monochrome	On	On	On	On
Color (80 x 25)	Monochrome	Off	On	On	On
NONE	Monochrome	Off	On	On	On
Enhanced color (Normal color mode)	Monochrome	On	Off	On	On
Enhanced color (Enhanced color mode)	Monochrome	Off	Off	On	On
Note: These settings apply when the CT-8190 & the Monochrome display adapter are both installed in your system. When the Monochrome is the primary display adapter; & when the CT-8190 is attached to the CGA or EGA monitor.					

PRIMARY & SECONDARY DISPLAY ADAPTER CONFIGURATION (TABLE 4)					
Primary	Secondary	SW1/1	SW1/2	SW1/3	SW1/4
Monochrome	NONE	Off	Off	On	Off
Monochrome	Color (40 x 25)	On	Off	On	Off
Monochrome	Color (80 x 25)	Off	Off	On	Off
Note: These settings apply when the CT-8190 & the Color graphics adapter are both installed in your system. When the CT-8190 is the primary display adapter; & when the Monochrome monitor is attached to the CT-8190.					

PRIMARY & SECONDARY DISPLAY ADAPTER CONFIGURATION (TABLE 5)					
Primary	Secondary	SW1/1	SW1/2	SW1/3	SW1/4
Monochrome or NONE	NONE	Off	Off	On	Off
Monochrome or NONE	Color (40 x 25)	On	On	Off	On
Monochrome or NONE	Color (80 x 25)	Off	On	Off	On
Note: These settings apply when the CT-8190 & the Color graphics adapter are both installed in your system. When the CGA is the primary display adapter; & when the Monochrome monitor is attached to the CT-8190.					

MONITOR DISPLAY CONFIGURATION	
Setting	SW1/5

Monochrome/CGA	On
EGA	Off