


# PACKARD BELL FORTE 16SBP

**Card Type**  
**Chipset Controller**  
**I/O Options**

**Maximum DRAM**

Sound Card  
Unidentified  
AUX (optional), CD-ROM audio in, CD-ROM interface (3), Game/MIDI port,  
line out, microphone, multiplexer (optional), speaker (2), wavetable connector  
N/A

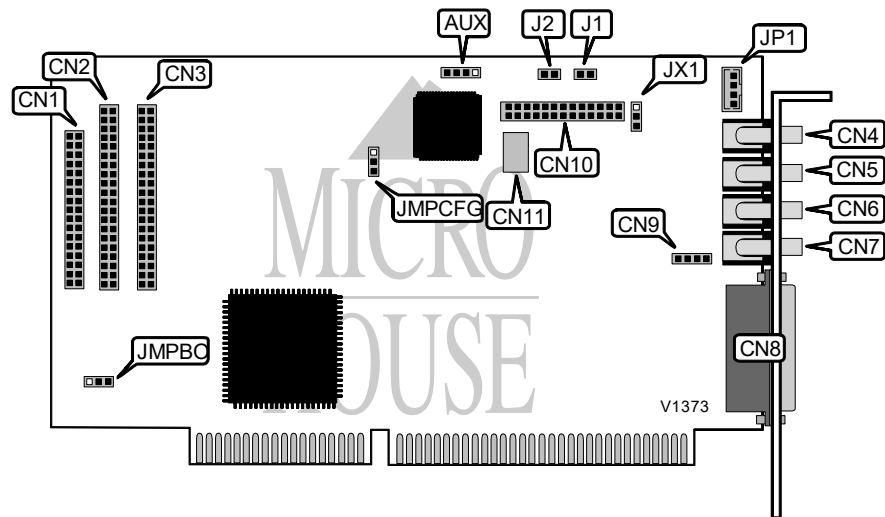

CONNECTIONS			
Purpose	Location	Purpose	Location
Optional AUX connector	AUX	Speaker jack	CN7
Sony CD-ROM interface	CN1	Game/MIDI port	CN8
Mitsumi CD-ROM interface	CN2	Internal Speaker	CN9
Panasonic CD-ROM interface	CN3	Wavetable	CN10
Line in	CN4	Multiplexer (optional)	CN11
Mic. in	CN5	CD-ROM audio in	JP1
Line out	CN6		

MICROPHONE TYPE	
Type	JX1
Condenser	Pins 1 & 2 closed
Carbon	Pins 2 & 3 closed

EPROM CONFIGURATION	
Setting	JMPCFG
Hardware settings based on EPROM	Pins 1 & 2 closed
Hardware settings not based on EPROM	Pins 2 & 3 closed

Continued on next page. . .

PACKARD BELL  
FORTE 16SBP

...continued from previous page

I/O ADDRESS SELECTION	
Address	JMPBO
220-22Hh	Pins 1 & 2 closed
240-24Fh	Pins 2 & 3 closed

FACTORY CONFIGURED SETTINGS	
Jumper	Setting
J1	N/A
J2	N/A