


ELSA, INC.
WINNER 1000(ISA-/EISA-BUS)

Category	Video
Video Types Supported	XVGA
Video Processor	Unidentified
Highest Resolution Supported	1280 x 768
Data Bus Type	32-bit EISA/16-bit ISA
Memory Type	VRAM
Maximum Onboard Memory	2MB

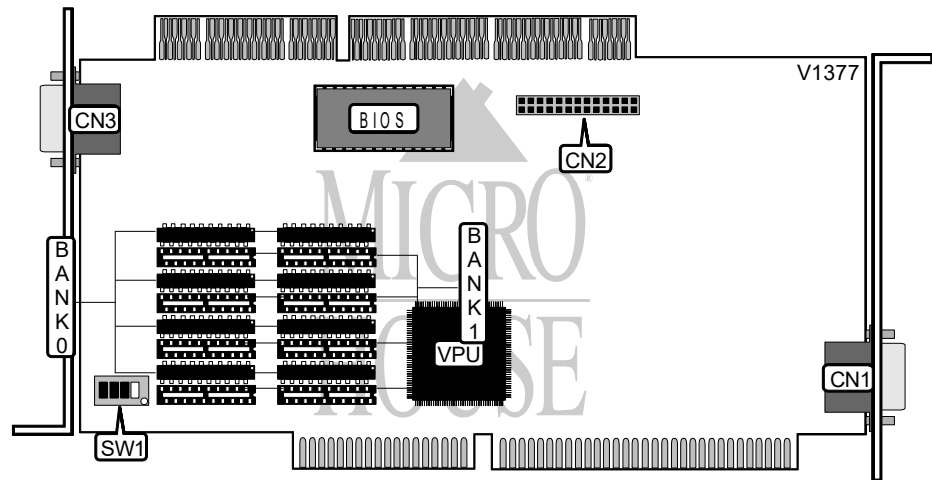

CONNECTIONS			
Purpose :	Location	Purpose :	Location
15-pin analog video port (ISA Bus)	CN1	15-pin analog video port (EISA Bus)	CN3
VGA feature connector	CN2		

VRAM MEMORY CONFIGURATION	
Memory	SW1/1
1MB	Off
2MB	On

BOARD CONFIGURATION	
Setting	SW1/2
SS4	Off
SS5	On

ZERO WAIT STATE CONFIGURATION	
Setting	SW1/3
Disabled	Off
Enabled	On

Continued on next page . . .

ELSA, INC.
WINNER 1000(ISA-/EISA-BUS)

...continued from previous page

INTERRUPT CONFIGURATION	
IRQ 2/9	SW1/4
Disabled	Off
Enabled	On

VRAM CONFIGURATION		
Memor	Bank 1	Bank 2
1MB	(8) 256K x 4 ZIP	NONE
2MB	(8) 256K x 4 ZIP	(8) 256K x 4 ZIP