ELSA, INC.
WINNER 1000ISA

Category	Video
Video Types Supported	XVGA
Video Processor	Unidentified
Highest Resolution Supported	1280 x 1024
Data Bus Type	16-bit ISA
Memory Type	DRAM
Maximum Onboard Memory	2MB
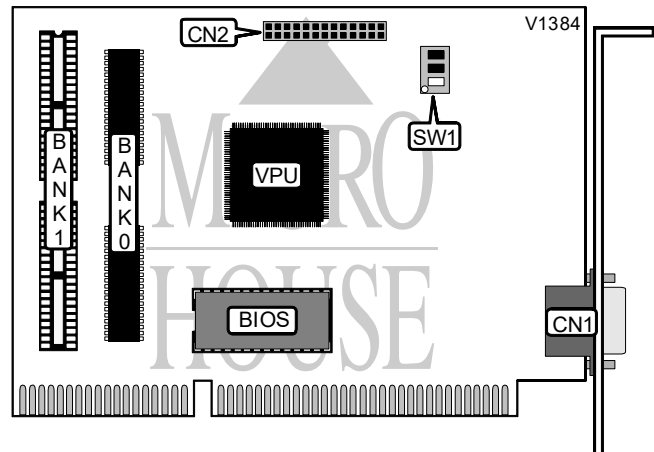
CONNECTIONS			
Purpose	Location	Purpose	Location
15-pin analog video port	CN1	VGA feature connector	CN2

ZERO WAIT STATE CONFIGURATION	
Setting	SW1/1
Disabled	Off
Enabled	On

BOARD CONFIGURATION	
Setting	SW1/2
First board	Off
Second board	On

ELSA, INC.
WINNER 1000ISA

continued from previous page

BIOS CONFIGURATION	
Setting	SW1/3
Disabled	On
Enabled	Off

DRAM CONFIGURATION		
Memor	Bank (	Bank
1MB	(2) 256K x 16	NONE
2MB	(2) 256K x 16	(2) 256K x 16