


ELSA, INC.
WINNER 1000VL

Category	Video
Video Types Supported	XVGA
Video Processor	Unidentified
Highest Resolution Supported	1024 x 768
Data Bus Type	32-bit VESA Local Bus
Memory Type	VRAM
Maximum Onboard Memory	2MB

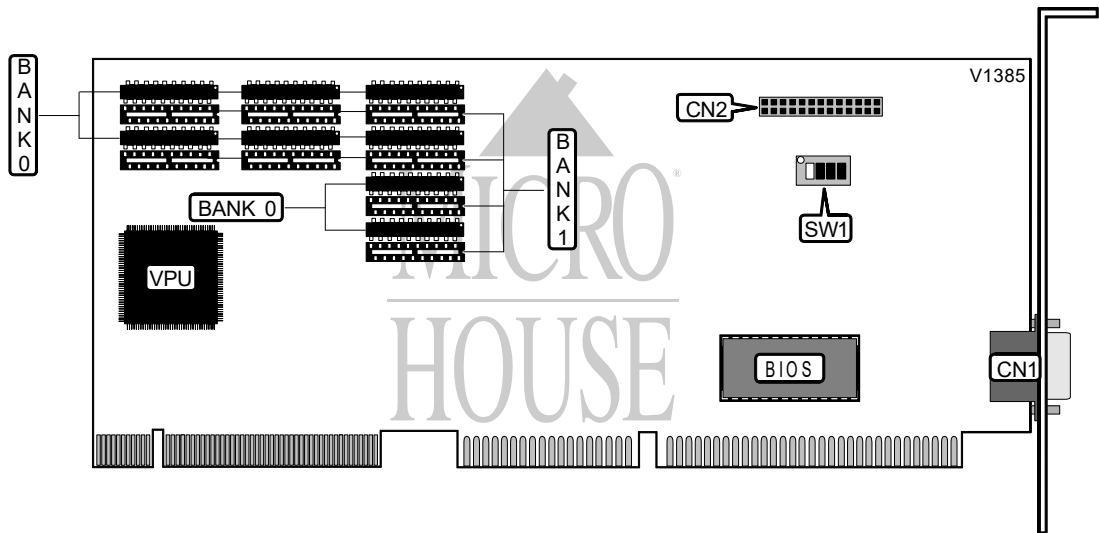

CONNECTIONS			
Purpose :	Location	Purpose :	Location
15-pin analog video port	CN1	VGA feature connector	CN2

VRAM MEMORY CONFIGURATION		
Memor	SW1/1	SW1/2
1MB	Off	Off
2MB	Off	On

BUS TYPE CONFIGURATION	
Type	SW1/3
VLD (VL-Bus)	Off
ISAD (ISA-Bus VESA feature connector used)	On

Continued on next page . . .

...continued from previous page

INTERRUPT CONFIGURATION	
IRQ 2/9	SW1/4
Disabled	Off
Enabled	On

VRAM CONFIGURATION		
Memor	Bank 1	Bank 2
1MB	(8) 256K x 4 ZIP	NONE
2MB	(8) 256K x 4 ZIP	(8) 256K x 4 ZIP