


ELSA, INC.

WINNER 2000(ISA-/EISA-BUS)

Category	Video
Video Types Supported	XVGA
Video Processor	Unidentified
Highest Resolution Supported	1280 x 1024
Data Bus Type	32-bit EISA/16-bit ISA
Memory Type	VRAM
Maximum Onboard Memory	4MB

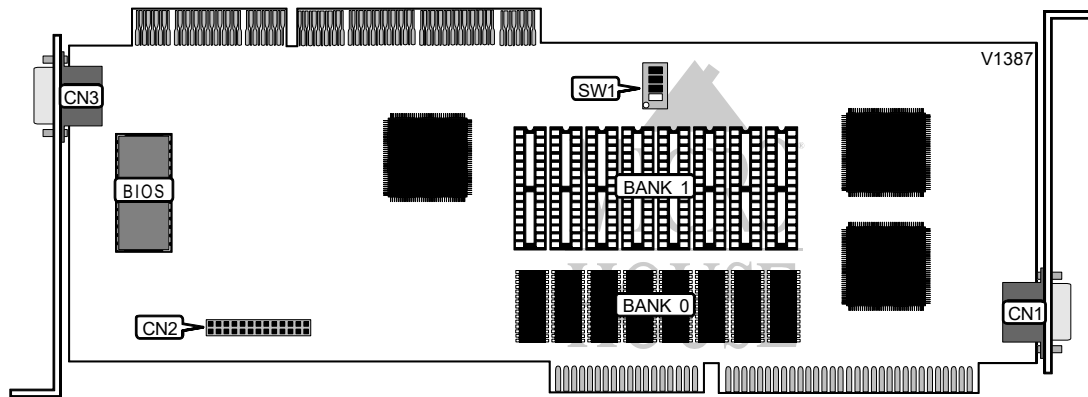

CONNECTIONS			
Purpose	Location	Purpose	Location
15-pin analog video port (ISA Bus)	CN1	15-pin analog video port (EISA Bus)	CN3
VGA feature connector	CN2		

BIOS CONFIGURATION	
Setting	SW1/1
Disabled	On
Enabled	Off

BOARD CONFIGURATION	
Setting	SW1/2
First board	Off
Second board	On

ZERO WAIT STATE CONFIGURATION	
Setting	SW1/3
Disabled	Off
Enabled	On

Continued on next page . . .

ELSA, INC.
WINNER 2000(ISA-/EISA-BUS)

...continued from previous page

INTERRUPT CONFIGURATION		
IRQ 2/9		SW1/4
Disabled		Off
Enabled		On

VRAM CONFIGURATION		
Memor	Bank 1	Bank 2
2MB	(8) 256K x 8	NONE
4MB	(8) 256K x 8	(8) 256K x 8