


LOGICODE TECHNOLOGY, INC.

28V14HV

Modem Type	Data (synchronous/asynchronous)/Fax/Voice
Maximum Data Rate	28.8Kbps
Maximum Fax Rate	14.4Kbps
Data Bus	8-bit ISA
Fax Class	Class I & II
Data Modulation Protocol	Bell 103A/212A ITU-T V.21, V.22, V.22bis, V.23, V.32, V.32bis, V.34 Rockwell V.FC
Fax Modulation Protocol	ITU-T V.17, V.21CH2, V.27ter, V.29
Error Correction/Compression	MNP5, V.42, V.42bis

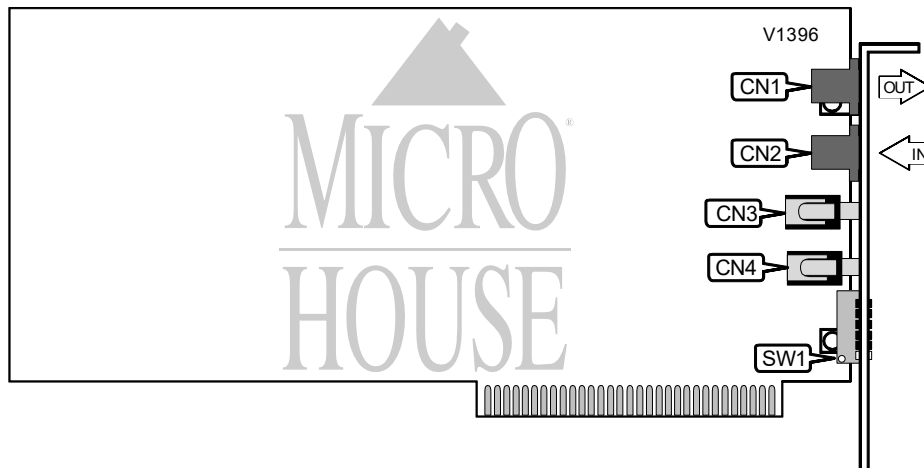

CONNECTIONS			
Purpos	Location	Purpos	Location
Line out	CN1	Speaker	CN3
Line in	CN2	Microphone	CN4

BASE I/O ADDRESS SELECTION		
Port	SW1/t	SW1/t
COM1: (3F8h)	On	ON
COM2: (2F8h)	On	Off
COM3: (3E8h)	Off	On
COM4: (2E8h)	Off	Off

INTERRUPT SELECTION				
IRQ	SW1/1	SW1/2	SW1/3	SW1/4
3	On	Off	Off	Off
4	Off	On	Off	Off

Proprietary AT Command Set

See document V1268 for a full command summary.