


ZOOM TELEPHONICS, INC.
V.34 I

| | |
|-------------------------------------|---|
| Modem Type | Data (synchronous/asynchronous)/Fax |
| Maximum Data Rate | 28.8Kbps |
| Maximum Fax Rate | 14.4Kbps |
| Data Bus | 8-bit ISA |
| Fax Class | Class I & II |
| Data Modulation Protocol | Bell 103A/212A ITU-T V.21, V.22, V.22bis, V.23, V.32, V.32bis, V.34 Rockwell V.FC |
| Fax Modulation Protocol | ITU-T V.17, V.21CH2, V.27ter, V.29 |
| Error Correction/Compression | MNP5, V.42, V.42bis |

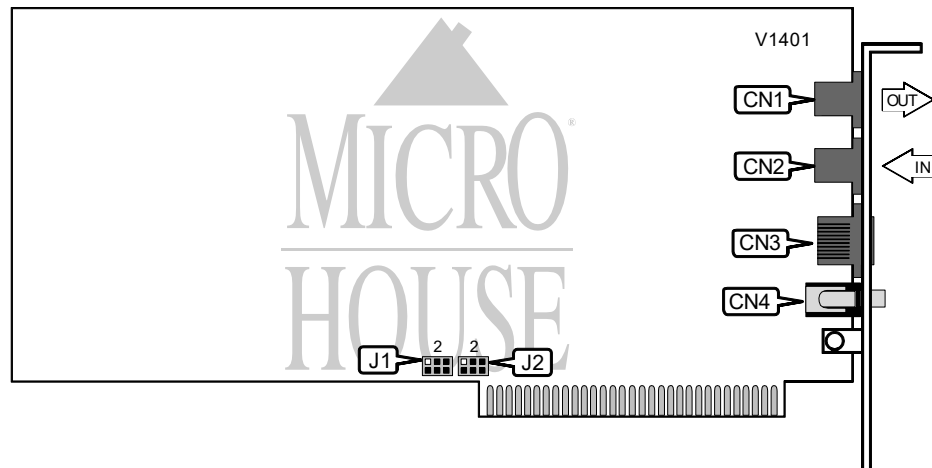

| CONNECTIONS | | | |
|-------------|----------|----------------------|----------|
| Purpos | Location | Purpos | Location |
| Line out | CN1 | Diagnostic connector | CN3 |
| Line in | CN2 | Speaker | CN4 |

| BASE I/O ADDRESS SELECTION | | | |
|----------------------------|----|--------------------------|-------------------|
| ort | RQ | J1 | J2 |
| COM1: (3F8h) | 4 | Pins 2 & 3, 5 & 6 closed | Pins 4 & 5 closed |
| COM2: (3E8h) | 3 | Pins 1 & 2, 5 & 6 closed | Pins 1 & 2 closed |
| COM3: (2F8h) | 4 | Pins 2 & 3, 4 & 5 closed | Pins 4 & 5 closed |
| COM4: (2E8h) | 3 | Pins 1 & 2, 4 & 5 closed | Pins 1 & 2 closed |
| COM3: (2F8h) | 2 | Pins 2 & 3, 4 & 5 closed | Pins 2 & 3 closed |
| COM4: (2E8h) | 2 | Pins 1 & 2, 4 & 5 closed | Pins 2 & 3 closed |
| COM3: (3E8h) | 5 | Pins 2 & 3, 4 & 5 closed | Pins 5 & 6 closed |
| COM4: (2E8h) | 5 | Pins 1 & 2, 4 & 5 closed | Pins 5 & 6 closed |

Continued on next page . . .

ZOOM TELEPHONICS, INC.
V.34 I

...continued from previous page

Proprietary AT Command Set

See document V1397 for a full command summary.