


CARDEXPERT TECHNOLOGY, INC.
ET4000/W32P VLB (VER. 2.0)

Category	Video
Video Types Supported	XVGA
Video Processor	Tseng Labs ET4000-W32P
Highest Resolution Supported	1280 x 1024
Data Bus Type	32-bit Vesa Local Bus
Memory Type	DRAM
Maximum Onboard Memory	2MB

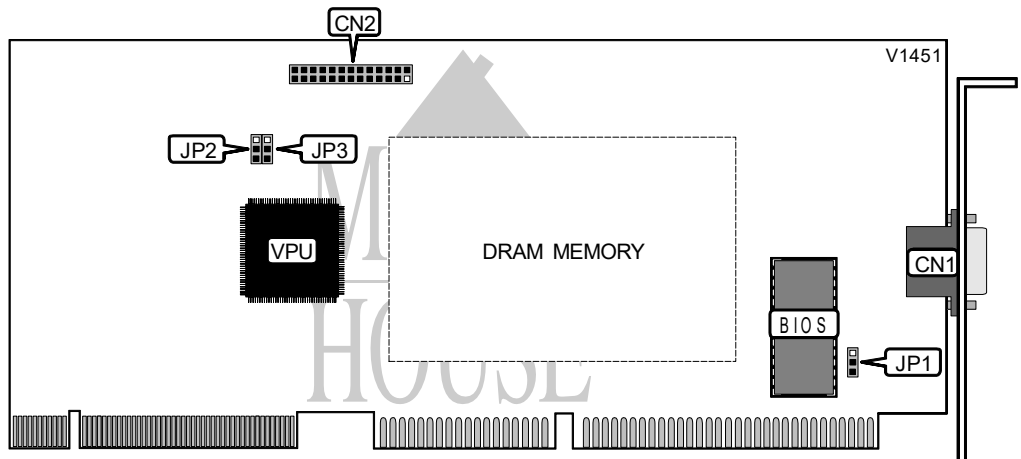

CONNECTIONS			
Purpose	Location	Purpose	Location
15-pin analog video port	CN1	VGA feature connector	CN2

INTERRUPT CONFIGURATION	
IRQ 2/9	JP1
Disabled	Pins 2 & 3 closed
Enabled	Pins 1 & 2 closed

EXTERNAL RAMDAC SNOOP OPTION CONFIGURATION	
Setting	JP2
Disabled	Pins 2 & 3 closed
Enabled	Pins 1 & 2 closed

DELAY COMMAND OPTION CONFIGURATION	
Setting	JP3
Disabled	Pins 2 & 3 closed
Enabled	Pins 1 & 2 closed

Continued on next page . . .

CARDEXPERT TECHNOLOGY, INC.
ET4000/W32P VLB (VER. 2.0)

...continued from previous page

DRAM CONFIGURATION		
Size	Bank 0	Bank 1
1MB	(4) 256K x 8	NONE
2MB	(4) 256K x 8	(4) 256K x 8
Note: DRAM chip size can also be 256K x 4 depending on the ET4000/W32P VLB version you have. Relative location of Bank 0 & Bank 1 is unidentified by the manufacturer.		