


CARDEXPERT TECHNOLOGY, INC.  
S3 TRIO64 V+

Category	Video
Video Types Supported	XVGA
Video Processor	S3 Trio64 V+
Highest Resolution Supported	1600 x 1200
Data Bus Type	32-bit PCI
Memory Type	DRAM
Maximum Onboard Memory	4MB

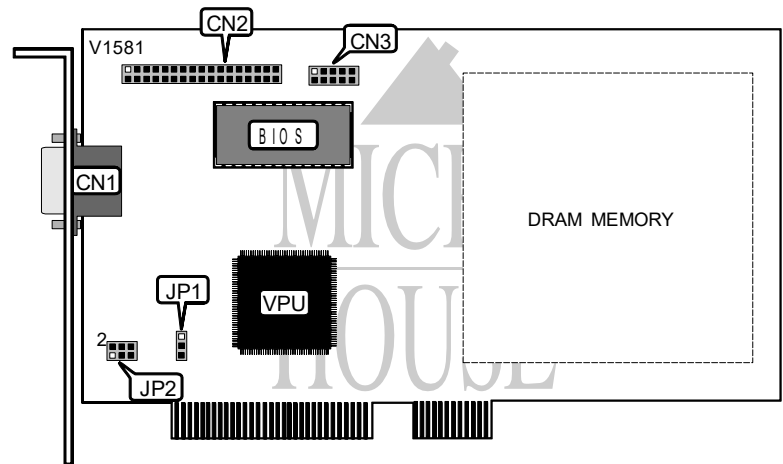

CONNECTIONS			
Purpose	Location	Purpose	Location
15-pin analog video port	CN1	10-pin connector	CN3
VGA feature connector/local peripheral bus connector	CN2		

INTERRUPT CONFIGURATION	
IRQ 2/9	JP1
Disabled	Pins 2 & 3 closed
Enabled	Pins 1 & 2 closed

DDC FUNCTION CONFIGURATION	
Setting	JP2
Disabled	Pins 3 & 5, 4 & 6 closed
Enabled	Pins 1 & 3, 2 & 4 closed

Continued on next page . . .

CARDEXPERT TECHNOLOGY, INC.  
S3 TRIO64 V+

...continued from previous page

DRAM CONFIGURATION			
ize	B nk 0	B nk 1	B nk 2
1MB	(2) 256K x 16	NONE	NONE
2MB	(2) 256K x 16	(2) 256K x 16	NONE
4MB	(2) 256K x 16	(2) 256K x 16	(4) 256K x 16
Note: Relative location of Bank 0, Bank 1 & Bank 2 is unidentified by the manufacturer.			