


DTK COMPUTER, INC.
PTI-210

Card Type
Chipset Controller
I/O Options
Maximum DRAM

Serial card
Unidentified
Parallel port, serial port (2)
N/A

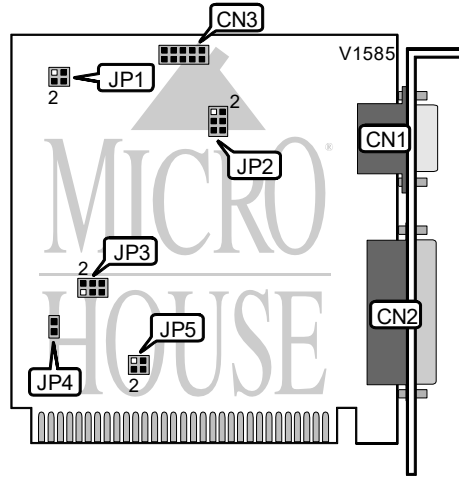

| CONNECTIONS | | | |
|----------------------|----------|------------------------------|----------|
| Purpose | Location | Purpose | Location |
| 9-pin serial port | CN1 | 10-pin serial port interface | CN3 |
| 25-pin parallel port | CN2 | | |

| AT COMPATIBLE PARALLEL PORT INTERRUPT CONFIGURATION | | |
|---|--------|-------------------|
| IRQ | JP4 | JP5 |
| 7 | Open | Pins 3 & 4 closed |
| 5 | Closed | Pins 1 & 2 closed |

Note: When selecting IRQ7 in XT mode JP4 can be configured to be open or closed.

| SERIAL PORT 1 & 2 CONFIGURATION | | | |
|---------------------------------|---------------|-------------------|--------------------------|
| Serial port 1 | Serial port 2 | JP1 | JP2 |
| COM1 (3F8h) | COM2 (2F8h) | Pins 1 & 3 closed | Pins 2 & 4, 3 & 5 closed |
| COM2 (2F8h) | COM1 (3F8h) | Pins 1 & 3 closed | Pins 1 & 3, 4 & 6 closed |
| COM3 (3E8h) | COM4 (2E8h) | Pins 2 & 4 closed | Pins 2 & 4, 3 & 5 closed |
| COM4 (2E8h) | COM3 (3E8h) | Pins 2 & 4 closed | Pins 1 & 3, 4 & 6 closed |

Continued next page...

... continued from previous page.

| SERIAL PORT 1 INTERRUPT CONFIGURATION | |
|---------------------------------------|-------------------|
| IRQ | JP3 |
| i 4 | Pins 2 & 4 closed |
| 3 | Pins 4 & 6 closed |

| SERIAL PORT 2 INTERRUPT CONFIGURATION | |
|---------------------------------------|-------------------|
| IRQ | JP3 |
| i 3 | Pins 3 & 5 closed |
| 4 | Pins 1 & 3 closed |