


COMPUTER PERIPHERALS, INC.

VIVA 9642 INTERNAL

Modem Type Data (synchronous/asynchronous)
Maximum Data Rate 9600bps
Data Bus 8-bit ISA
Data Modulation Protocol Bell 103A/212A
 ITU-T V.21, V.22, V.22bis, V.23, V.32
Error Correction/Compression MNP5, V.42, V.42bis

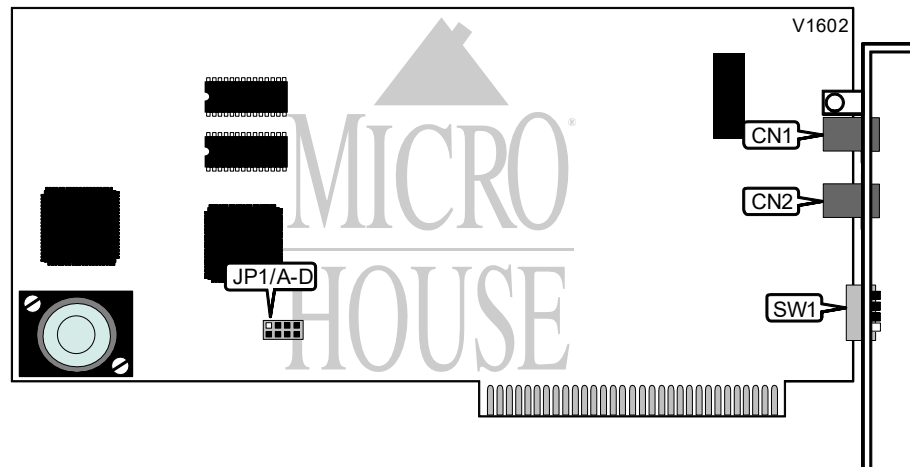

CONNECTIONS			
Purpos	Location	Purpos	Location
Line out	CN1	Line in	CN2

BASE I/O ADDRESS SELECTION				
Port	SW1/1	SW1/2	SW1/3	SW1/4
COM1: (3F8h)	On	Off	Off	Off
COM2: (2F8h)	Off	On	Off	Off
COM3: (3E8h)	Off	Off	On	Off
i COM4: (2E8h)	Off	Off	Off	On

INTERRUPT SELECTION				
IRQ	JP1/A	JP1/B	JP1/C	JP1/D
2	Open	Open	Open	Closed
i 3	Closed	Open	Open	Open
4	Open	Closed	Open	Open
5	Open	Open	Closed	Open

Proprietary AT Command Set

See document V1599 for a full command summary.