


COMPUTER PERIPHERALS, INC.

VIVA DATA/FAX INTERNAL

Modem Type	Data (asynchronous)/Fax
Maximum Data Rate	2400bps
Maximum Fax Rate	9600bps
Data Bus	8-bit ISA
Fax Class	Class I
Data Modulation Protocol	Bell 103A/212A
	ITU-T V.21, V.22, V.22bis
Fax Modulation Protocol	ITU-T V.27ter, V.29
Error Correction/Compression	MNP5, V.42bis

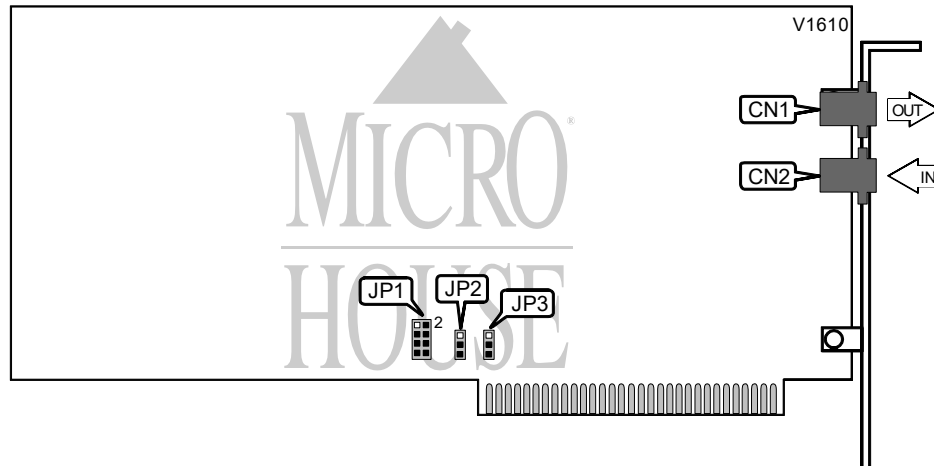

CONNECTIONS			
Purpos	Location	Purpos	Location
Line out	CN1	Line in	CN2

BASE I/O ADDRESS & INTERRUPT SELECTION		
Port	JP2	JP3
COM1: (3F8h)	Pins 2 & 3 closed	Pins 2 & 3 closed
COM2: (2F8h)	Pins 2 & 3 closed	Pins 1 & 2 closed
COM3: (3E8h)	Pins 1 & 2 closed	Pins 2 & 3 closed
i COM4: (2E8h)	Pins 1 & 2 closed	Pins 1 & 2 closed

INTERRUPT SELECTION	
IRQ	JP1
i 3	Pins 1 & 2 closed
4	Pins 3 & 4 closed
5	Pins 5 & 6 closed
7	Pins 7 & 8 closed

Continued on next page . . .

Proprietary AT Command Set

BIT-MAPPED REGISTERS	
Register	Default
S14	170
S16	0
S21	0
S22	118
S23	7
S27	64
S28	0

DTMF ATTENUATION	
Type:	Configuration
Format:	AT [cmds] %Dn [cmds]
Example:	AT%D1<CR>
Default:	Unidentified
Range:	Unidentified
Unit:	2dB
Description:	Sets the DTMF level.

SMT LEVEL ATTENUATION	
Type:	Configuration
Format:	AT [cmds] %Ln [cmds]
Example:	AT%L2<CR>
Default:	Unidentified
Range:	Unidentified
Unit:	2dB
Description:	Sets the SMT level.