


COMPUTER PERIPHERALS, INC.
VIVA 24 INTERNAL

Modem Type	Data (asynchronous)
Maximum Data Rate	2400bps
Data Bus	8-bit ISA
Data Modulation Protocol	Bell 103A/212A ITU-T V.21, V.22, V.22bis
Error Correction/Compression	MNP5, V.42bis

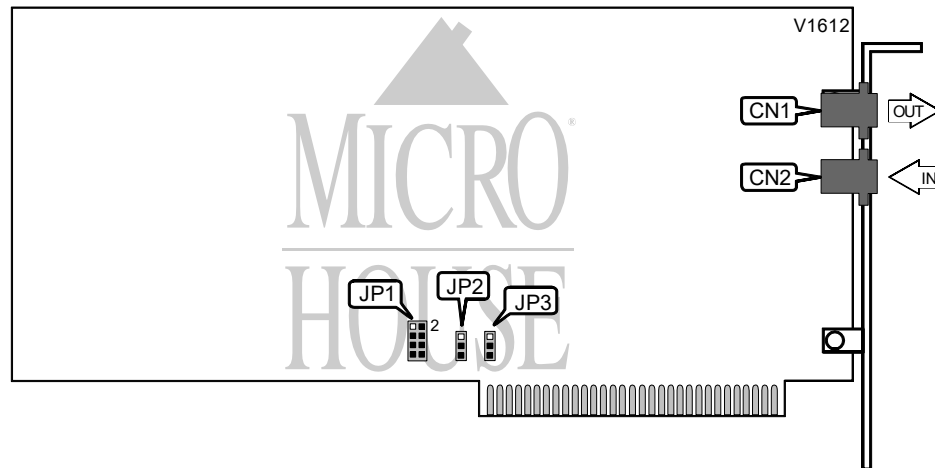

CONNECTIONS			
Purpos	Location	Purpos	Location
Line out	CN1	Line in	CN2

BASE I/O ADDRESS SELECTION		
Port	JP2	JP3
COM1: (3F8h)	Pins 2 & 3 closed	Pins 2 & 3 closed
COM2: (2F8h)	Pins 2 & 3 closed	Pins 1 & 2 closed
COM3: (3E8h)	Pins 1 & 2 closed	Pins 2 & 3 closed
COM4: (2E8h)	Pins 1 & 2 closed	Pins 1 & 2 closed

INTERRUPT SELECTION	
IRQ	JP1
3	Pins 1 & 2 closed
4	Pins 3 & 4 closed
5	Pins 5 & 6 closed
7	Pins 7 & 8 closed

Proprietary AT Command Set

See document V1610 for a full command summary.