
ATC/UNITRON COMPUTERS U 4062VL

Card Type Video card
Video Chip Set Unidentified
Maximum Video Memory 2MB DRAM
Data Bus 16-bit ISA
Video Types Supported XVGA
Highest Resolution Supported 1280 x 1024

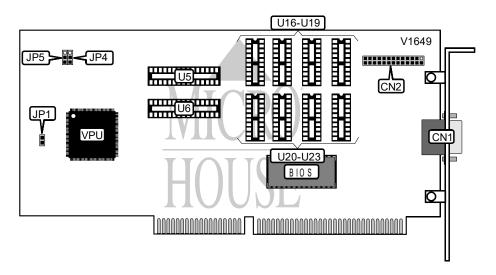

| CONNECTIONS | | | | | |
|--------------------------|-------|-------------------|-------|--|--|
| Function | Label | Function | Label | | |
| 15-pin analog video port | CN1 | Feature connector | CN2 | | |

| USER CONFIGURABLE SETTINGS | | | | |
|----------------------------|-------|----------|--|--|
| Function | Label | Position | | |
| IRQ9 enabled | JP1 | Closed | | |
| IRQ9 disabled | JP1 | Open | | |

DRAM CONFIGURATION

Note: The banks hold 0.5MB, 1MB, and 2MB, but the exact location is unidentified. U3 & U5 hold 44260 chip size and U16-U23 hold 44256 chip size

| DRAM BOOT JUMPER CONFIGURATION | | | | |
|--------------------------------|-------------------|-------------------|--|--|
| Setting | JP4 | JP5 | | |
| Booting from U16-U23 | Pins 2 & 3 closed | Pins 1 & 2 closed | | |
| Booting from U3 & U5 | Pins 1 & 2 closed | Pins 2 & 3 closed | | |