


CREATIX POLYMEDIA

UMC 14.4/VOICE (INTERNAL REV.1)

Card Type	Modem (synchronous/asynchronous)
Chip Set	UMC
I/O Options	Voice
Maximum Data Rate	14.4Kbps
Maximum Fax Rate	14.4Kbps
Data Bus	8-bit ISA
Fax Class	Class I & II
Data Modulation Protocol	Bell 103A/212A
Fax Modulation Protocol	ITU-T V.21, V.22, V.22bis, V.23, V.32, V.32bis
Error Correction/Compression	ITU-T V.17, V.21CH2, V.27ter, V.29 MNP5, V.42, V.42bis

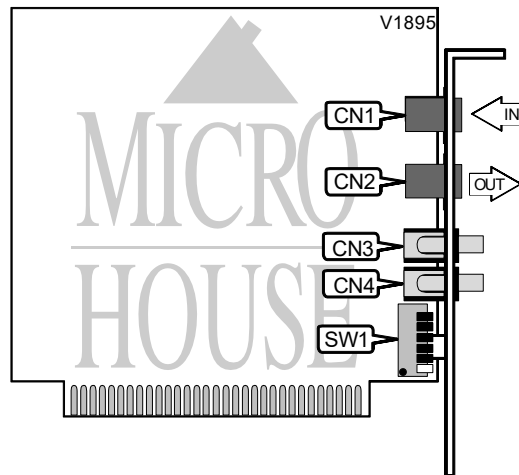

CONNECTIONS			
Function	Label	Function	Label
Line in	CN1	Speaker out	CN3
Line out	CN2	Microphone in	CN4

SERIAL PORT ADDRESS			
Setting	SW1/1	SW1/2	SW1/3
COM1 (3F8h)	On	On	On
COM2 (2F8h)	Off	On	On
COM3 (3E8h)	On	Off	Off
COM4 (2E8h)	Off	Off	Off

INTERRUPT				
Setting	SW1/3	SW1/4	SW1/5	SW1/6
2	On	Off	Off	Off
3	Off	On	Off	Off
4	Off	Off	On	Off
5	Off	Off	Off	On

Proprietary AT Command Set

See document V1894 for a full command summary.