


CREATIX POLYMEDIA

SIERRA VOICE PNP 28.8 (INTERNAL REV.1)

Card Type	Fax, Modem (asynchronous), Voice
Chip Set	Sierra
I/O Options	Voice
Maximum Data Rate	28.8Kbps
Maximum Fax Rate	14.4Kbps
Data Bus	8-bit ISA
Fax Class	Class I & II
Data Modulation Protocol	Bell 103A/212A
Fax Modulation Protocol	ITU-T V.21, V.22, V.22bis, V.32, V.32bis, V.34
Error Correction/Compression	ITU-T V.17, V.21CH2, V.27ter, V.29 MNP5, V.42, V.42bis

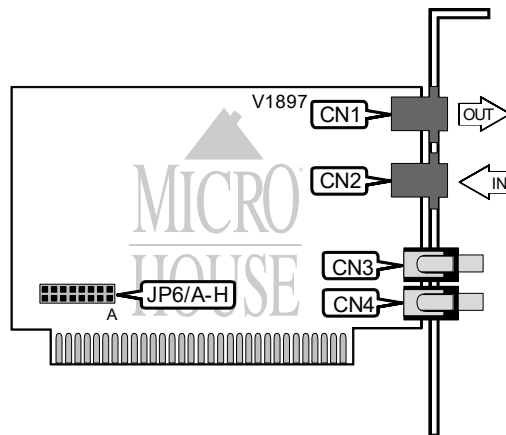

CONNECTIONS			
Function	Label	Function	Label
Line out	CN1	Speaker out	CN3
Line in	CN2	Microphone in	CN4

SERIAL PORT ADDRESS		
Setting	JP6/A	JP6/B
COM1 (3F8h)	Open	Open
COM2 (2F8h)	Closed	Open
COM3 (3E8h)	Open	Closed
COM4 (2E8h)	Closed	Closed

INTERRUPT						
Setting	JP6/C	JP6/D	JP6/E	JP6/F	JP6/G	JP6/H
3	Closed	Open	Open	Open	Open	Open
4	Open	Closed	Open	Open	Open	Open
5	Open	Open	Closed	Open	Open	Open
10	Open	Open	Open	Closed	Open	Open
11	Open	Open	Open	Open	Closed	Open
12	Open	Open	Open	Open	Open	Closed

Proprietary AT Command Set

See document V1896 for a full command summary.