


CREATIX POLYMEDIA

AT&T 28.8 (INTERNAL REV.1)

Card Type	Modem (asynchronous)
Chip Set	AT&T
I/O Options	Voice
Maximum Data Rate	28.8Kbps
Maximum Fax Rate	14.4Kbps
Data Bus	8-bit ISA
Fax Class	Class I & II
Data Modulation Protocol	Bell 103A/212A
Fax Modulation Protocol	ITU-T V.21, V.22, V.22bis, V.23, V.32, V.32bis, V.32terbo, V.34
Error	ITU-T V.17, V.21CH2, V.27ter, V.29
Correction/Compression	MNP5, V.42, V.42bis

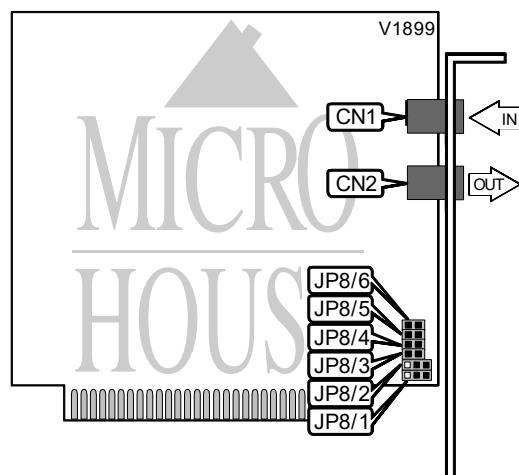

CONNECTIONS			
Function	Label	Function	Label
Line in	CN1	Line out	CN2

SERIAL PORT ADDRESS		
Setting	JP8/1	JP8/2
COM1 (3F8h)	Pins 1 & 2 closed	Pins 1 & 2 closed
COM2 (2F8h)	Pins 2 & 3 closed	Pins 1 & 2 closed
COM3 (3E8h)	Pins 1 & 2 closed	Pins 2 & 3 closed
COM4 (2E8h)	Pins 2 & 3 closed	Pins 2 & 3 closed

INTERRUPT				
Setting	JP8/3	JP8/4	JP8/5	JP8/6
2	Closed	Open	Open	Open
3	Open	Closed	Open	Open
4	Open	Open	Closed	Open
5	Open	Open	Open	Closed

Proprietary AT Command Set

See document V1898 for a full command summary.