


U.S. ROBOTICS, INC. SPORTSTER VI 28.8 INT

Card Type	Fax, Modem (asynchronous), Voice
Chip Set	U.S. Robotics
I/O Options	Speakerphone, Voice-mail, Voice View
Maximum Data Rate	28.8Kbps
Maximum Fax Rate	14.4Kbps
Data Bus	8-bit ISA
Fax Class	Class I & II
Data Modulation Protocol	Bell 103/212A ITU-T V.21, V.22, V.22bis, V.23, V.25, V.32, V.32bis, V.34 Rockwell V.FC
Fax Modulation Protocol	Unidentified
Error Correction/Compression	MNP5, V.42, V.42bis

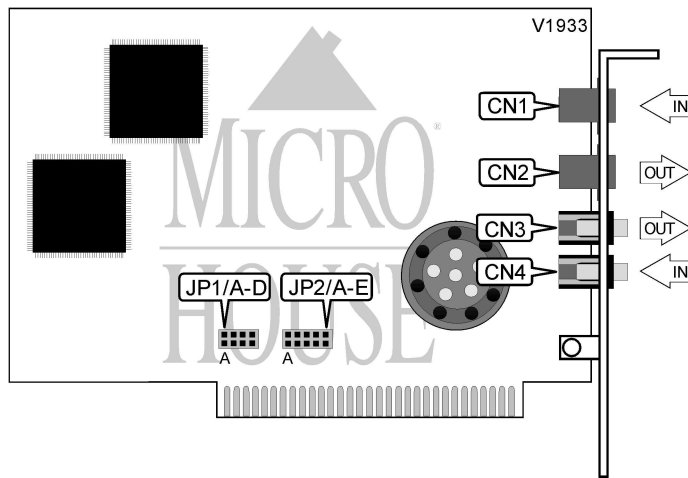

CONNECTIONS			
Function	Label	Function	Label
Line in	CN1	Microphone out	CN3
Line out	CN2	Speaker in	CN4

SERIAL PORT ADDRESS				
Setting	JP1/A	JP1/B	JP1/C	JP1/D
COM1 (3F8h)	Closed	Open	Open	Open
COM2 (2F8h)	Open	Closed	Open	Open
COM3 (3E8h)	Open	Open	Closed	Open
COM4 (2E8h)	Open	Open	Open	Closed

INTERRUPT					
Setting	JP2/A	JP2/B	JP2/C	JP2/D	JP2/E
2	Closed	Open	Open	Open	Open
3	Open	Closed	Open	Open	Open
4	Open	Open	Closed	Open	Open
5	Open	Open	Open	Closed	Open
7	Open	Open	Open	Open	Closed

Proprietary AT Command Set

See document V1932 for a full command summary.