


# ACER, INC.

## 28.8 INTERNAL MODEM (JUMPER)

<b>Card Type</b>	Modem(synchronous/asynchronous), Fax, Voice
<b>Chip Set</b>	Unidentified
<b>Maximum Data Rate</b>	28.8Kbps
<b>Maximum Fax Rate</b>	14.4Kbps
<b>Data Bus</b>	8-bit ISA
<b>Fax Class</b>	Class I & II
<b>Data Modulation Protocol</b>	Bell 103A/212A
<b>Fax Modulation Protocol</b>	ITU-T V.22, V.22bis, V.32, V.32bis, V.32terbo, V.34
<b>Error Correction/Compression</b>	ITU-T V.17, V.21CH2, V.27ter, V.29
	MNP2-5, V.42, V.42bis

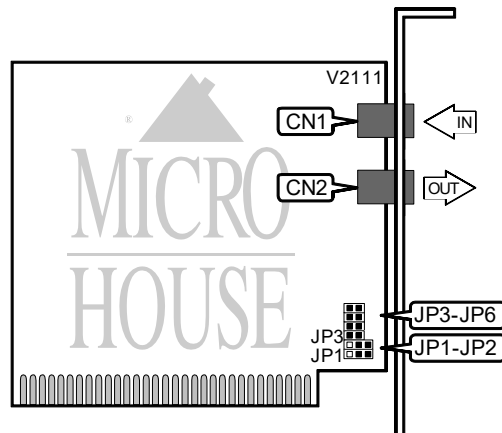

CONNECTIONS			
Function	Label	Function	Label
Line in	CN1	Line out	CN2

COM PORT ADDRESS			
Setting	JP1	JP2	
COM1 (3F8h)	Pins 1 & 2 closed	Pins 1 & 2 closed	
COM2 (2F8h)	Pins 2 & 3 closed	Pins 1 & 2 closed	
COM3 (3E8h)	Pins 1 & 2 closed	Pins 2 & 3 closed	
COM4 (2E8h)	Pins 2 & 3 closed	Pins 2 & 3 closed	

INTERRUPT				
Setting	JP3	JP4	JP5	JP6
IRQ2	Closed	Open	Open	Open
IRQ3	Open	Closed	Open	Open
IRQ4	Open	Open	Closed	Open
IRQ5	Open	Open	Open	Closed

## Proprietary AT Command Set

See document V2110 for a full command summary.