


ACER, INC.

28.8 INTERNAL MODEM (DIP SWITCH)

Card Type	Modem(synchronous/asynchronous), Fax, Voice
Chip Set	Unidentified
Maximum Data Rate	28.8Kbps
Maximum Fax Rate	14.4Kbps
Data Bus	8-bit ISA
Fax Class	Class I & II
Data Modulation Protocol	Bell 103A/212A
Fax Modulation Protocol	ITU-T V.22, V.22bis, V.32, V.32bis, V.32terbo, V.34
Error Correction/Compression	ITU-T V.17, V.21CH2, V.27ter, V.29
	MNP2-5, V.42, V.42bis

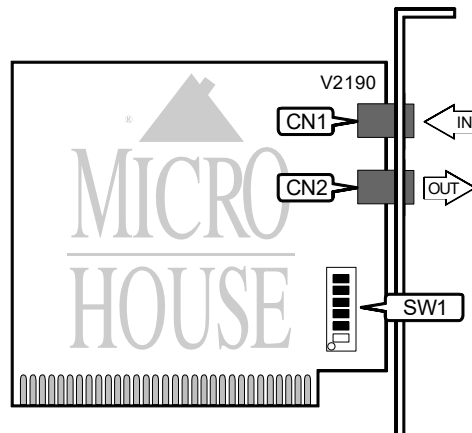

CONNECTIONS			
Function	Label	Function	Label
Line in	CN1	Line out	CN2

COM PORT ADDRESS		
Setting	SW1/1	SW1/2
COM1 (3F8h)	On	On
COM2 (2F8h)	Off	On
COM3 (3E8h)	On	Off
COM4 (2E8h)	Off	Off

INTERRUPT				
Setting	SW1/3	SW1/4	SW1/5	SW1/6
IRQ2	On	Off	Off	Off
IRQ3	Off	On	Off	Off
IRQ4	Off	Off	On	Off
IRQ5	Off	Off	Off	On

Proprietary AT Command Set

See document V2110 for a full command summary.