


# JATON CORPORATION

## MCG6618 V3

Card Type	Multi-I/O card
Chip Set	Unidentified
Maximum Onboard Memory	None
I/O Options	Floppy drive interface, game port, light pen, mouse connector, parallel port, serial port (2), VGA port
Data Bus	8-bit ISA
Floppy drives supported	Two 360KB or 720KB drives

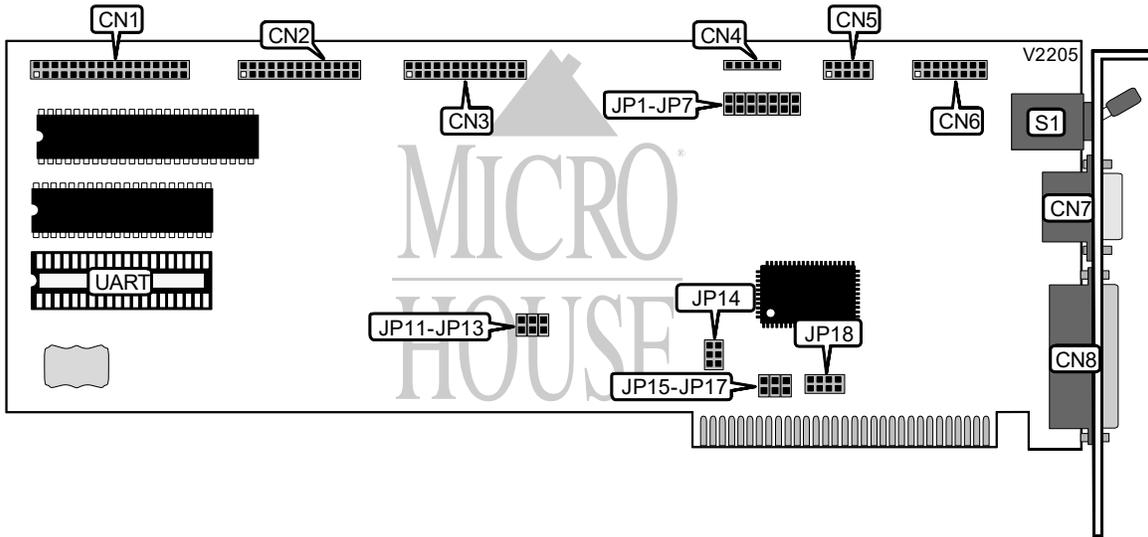

CONNECTIONS			
Function	Label	Function	Label
Floppy drive interface	CN1	Mouse port	CN5
Serial port (1) interface	CN2	Game port	CN6
Serial port (2) interface	CN3	VGA port	CN7
Light pen connector	CN4	25-pin parallel port	CN8

USER CONFIGURABLE SETTINGS			
Function	Label	Position	
í Mouse port enabled	JP5	Closed	
Mouse port disabled	JP5	Open	
í Parallel port enabled	JP6	Closed	
Parallel port disabled	JP6	Open	
í Game port enabled	JP7	Closed	
Game port disabled	JP7	Open	
í Serial port (1 or 2) COM1 enabled	JP12	Closed	
Serial port (1 or 2) COM1 disabled	JP12	Open	
í Serial port (1 or 2) COM2 enabled	JP13	Closed	
Serial port (1 or 2) COM2 disabled	JP13	Open	

Continued on next page. . .

JATON CORPORATION  
MCG6618 V3

. . . continued from previous page

MOUSE PORT INTERRUPT SELECTION					
IRQ	JP1	JP2	JP3	JP4	JP18
2	Closed	Open	Open	Open	Pins 1 & 2 closed
3	Open	Closed	Open	Open	Pins 3 & 4 closed
4	Open	Open	Closed	Open	Pins 5 & 6 closed
5	Open	Open	Open	Closed	Pins 7 & 8 closed

Note: The exact location of pin 1 on JP18 is unidentified.

SERIAL PORT (1) CONFIGURATION			
Setting	IRQ	JP11	JP14
í COM1 (3F8h)	4	Closed	Pins 1 & 2, 3 & 4 closed
í COM2 (2F8h)	3	Open	Pins 1 & 2, 5 & 6 closed

Note: The exact location of pin 1 on JP14 is unidentified.

SERIAL PORT (2) CONFIGURATION			
Setting	IRQ	JP11	JP14
COM1 (3F8h)	4	Open	Pins 1 & 2, 3 & 4 closed
í COM2 (2F8h)	3	Closed	Pins 1 & 2, 5 & 6 closed

Note: The exact location of pin 1 on JP14 is unidentified.

TIMER INTERRUPT SELECTION			
IRQ	JP15	JP16	JP17
2	Closed	Open	Open
4	Open	Closed	Open
5	Open	Open	Closed

VGA GRAPHIC CONFIGURATION	
Setting	S1
Monochrome	On
Color	Off