


Card Type	CD-ROM interface card
Chip Set	Unidentified
Maximum Onboard Memory	None
I/O Options	Audio in, audio in/out (2), data in, I <sup>2</sup> S signal
Data Bus	16-bit ISA
Floppy drives supported	None

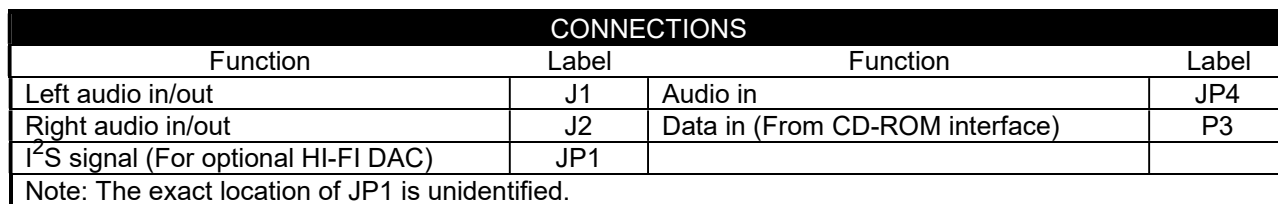

USER CONFIGURABLE SETTINGS			
Function		Label	Position
í	Optional DAC disabled	JP2	Pins 2 & 3 closed
	Optional DAC enabled	JP2	Pins 1 & 2 closed
í	Audio in enabled	JP3	Pins 2 & 3 closed
	Audio in disabled	JP3	Pins 1 & 2 closed
Note: The exact location of pin 1 on JP2 & JP3 is unidentified.			

DMA CHANNEL SELECTION		
Channel	JP5	JP6
0	Pins 1 & 2 closed	Pins 1 & 2 closed
1	Pins 3 & 4 closed	Pins 3 & 4 closed
2	Pins 5 & 6 closed	Pins 5 & 6 closed
3	Pins 7 & 8 closed	Pins 7 & 8 closed
5	Pins 9 & 10 closed	Pins 9 & 10 closed
6	Pins 11 & 12 closed	Pins 11 & 12 closed
7	Pins 13 & 14 closed	Pins 13 & 14 closed
f Programmed I/O	Open	Open

Note: The exact location of pin 1 on JP5 & JP6 is unidentified.

*Continued on next page. . .*

# BEHAVIOR TECH COMPUTER CORPORATION

## CDC-005

... continued from previous page

INTERRUPT SELECTION	
IRQ	JP7
2/9	Pins 11 & 12 closed
3	Pins 1 & 2 closed
4	Pins 3 & 4 closed
5	Pins 5 & 6 closed
6	Pins 7 & 8 closed
7	Pins 9 & 10 closed
10	Pins 13 & 14 closed
11	Pins 15 & 16 closed
í None	Open

Note: The exact location of pin 1 on JP7 is unidentified.

BASE I/O ADDRESS SELECTION	
Address	JP8
300h	Pins 1 & 2 closed
320h	Pins 3 & 4 closed
330h	Pins 5 & 6 closed
í 340h	Pins 7 & 8 closed
360h	Pins 9 & 10 closed

Note: The exact location of pin 1 on JP8 is unidentified.

MISCELLANEOUS TECHNICAL NOTE
Note: The CDC-005 interface card works in conjunction with the CDD-110 CD-ROM drive by "Behavior Tech Computer Corporation".