


AST RESEARCH, INC. MEGAPLUS (REV. 6)

Card Type	Multi-I/O card
Chip Set	Unidentified
Maximum Onboard Memory	512KB DRAM (with MegaPak option)
I/O Options	Parallel port, serial ports (2)
Data Bus	8-bit ISA
Floppy drives supported	None

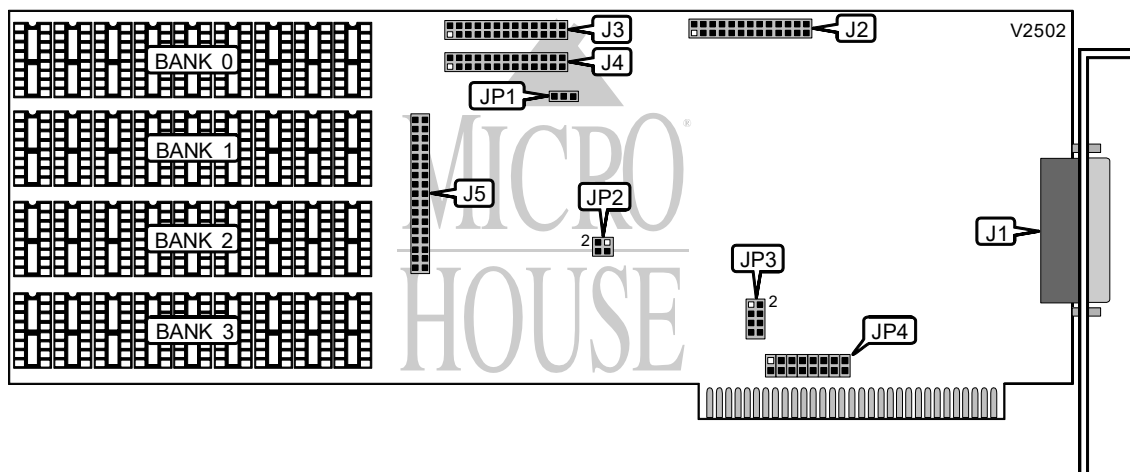

CONNECTIONS			
Function	Label	Function	Label
Serial port 1	J1	DCE connector	J4
Parallel port	J2	Daughter board connector	J5
DTE connector	J3		

USER CONFIGURABLE SETTINGS			
Function	Label	Position	
DTE pin select	JP1	Pins 1 & 2 closed	
DCE pin select	JP1	Pins 2 & 3 closed	
COM 1 enabled	JP3	Pins 3 & 4 closed	
COM 2 enabled	JP3	Pins 5 & 6 closed	

DRAM CONFIGURATION				
Size	Bank 0	Bank 1	Bank 2	Bank 3
64KB	(8) 64K x 1	None	None	None
128KB	(8) 64K x 1	(8) 64K x 1	None	None
192KB	(8) 64K x 1	(8) 64K x 1	(8) 64K x 1	None
256KB	(8) 64K x 1	(8) 64K x 1	(8) 64K x 1	(8) 64K x 1

Continued on next page. . .

AST RESEARCH, INC.
MEGAPLUS (REV. 6)

. . . continued from previous page

INTERRUPT CONFIGURATION								
IRQ	JP4/A	JP4/B	JP4/C	JP4/D	JP4/E	JP4/F	JP4/G	JP4/H
IRQ2S	Closed	Open	Open	Open	Open	Open	Open	Open
IRQ2C	Open	Closed	Open	Open	Open	Open	Open	Open
IRQ3S	Open	Open	Closed	Open	Open	Open	Open	Open
IRQ3	Open	Open	Open	Closed	Open	Open	Open	Open
IRQ4	Open	Open	Open	Open	Closed	Open	Open	Open
IRQ4C	Open	Open	Open	Open	Open	Closed	Open	Open
IRQ5C	Open	Open	Open	Open	Open	Open	Closed	Open
IRQ5S	Open	Open	Open	Open	Open	Open	Open	Closed

MISCELLANEOUS TECHNICAL NOTES

Note: The purpose of JP2 is unidentified.