


# INTEL CORPORATION ABOVE BOARD/PC

|                         |              |
|-------------------------|--------------|
| Card Type               | Memory card  |
| Chip Set                | Unidentified |
| Maximum Onboard Memory  | 2MB DRAM     |
| I/O Options             | None         |
| Data Bus                | 16-bit ISA   |
| Floppy drives supported | None         |

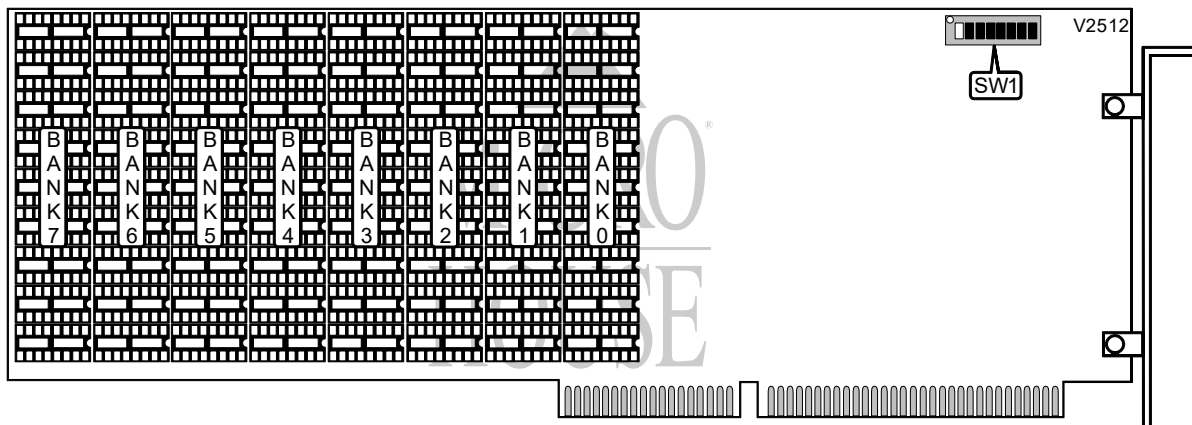

| USER CONFIGURABLE SETTINGS |       |          |
|----------------------------|-------|----------|
| Function                   | Label | Position |
| Chip type select 64KB      | SW1/1 | Off      |
| Chip type select 256KB     | SW1/1 | On       |

| DRAM CONFIGURATION |            |            |            |            |
|--------------------|------------|------------|------------|------------|
| Size               | Bank 0     | Bank 1     | Bank 2     | Bank 3     |
| 64KB               | (9) 4164K  | None       | None       | None       |
| 128KB              | (9) 4164K  | (9) 4164K  | None       | None       |
| 256KB              | (9) 4164K  | (9) 4164K  | (9) 4164K  | None       |
| 320KB              | (9) 4164K  | (9) 4164K  | (9) 4164K  | (9) 4164K  |
| 380KB              | (9) 4164K  | (9) 4164K  | (9) 4164K  | (9) 4164K  |
| 448KB              | (9) 4164K  | (9) 4164K  | (9) 4164K  | (9) 4164K  |
| 512KB              | (9) 4164K  | (9) 4164K  | (9) 4164K  | (9) 4164K  |
| 576KB              | (9) 4164K  | (9) 4164K  | (9) 4164K  | (9) 4164K  |
| 256KB              | (9) 41256K | None       | None       | None       |
| 512KB              | (9) 41256K | (9) 41256K | None       | None       |
| 768KB              | (9) 41256K | (9) 41256K | (9) 41256K | None       |
| 1024KB             | (9) 41256K | (9) 41256K | (9) 41256K | (9) 41256K |
| 1280KB             | (9) 41256K | (9) 41256K | (9) 41256K | (9) 41256K |
| 1536KB             | (9) 41256K | (9) 41256K | (9) 41256K | (9) 41256K |
| 1792KB             | (9) 41256K | (9) 41256K | (9) 41256K | (9) 41256K |
| 2048KB             | (9) 41256K | (9) 41256K | (9) 41256K | (9) 41256K |

Continued on next page. . .

# INTEL CORPORATION ABOVE BOARD/PC

. . . continued from previous page

| DRAM CONFIGURATION (CON'T) |            |            |            |            |
|----------------------------|------------|------------|------------|------------|
| Size                       | Bank 4     | Bank 5     | Bank 6     | Bank 7     |
| 64KB                       | None       | None       | None       | None       |
| 128KB                      | None       | None       | None       | None       |
| 256KB                      | None       | None       | None       | None       |
| 320KB                      | None       | None       | None       | None       |
| 380KB                      | (9) 4164K  | None       | None       | None       |
| 448KB                      | (9) 4164K  | (9) 4164K  | None       | None       |
| 512KB                      | (9) 4164K  | (9) 4164K  | (9) 4164K  | None       |
| 576KB                      | (9) 4164K  | (9) 4164K  | (9) 4164K  | (9) 4164K  |
| 256KB                      | None       | None       | None       | None       |
| 512KB                      | None       | None       | None       | None       |
| 768KB                      | None       | None       | None       | None       |
| 1024KB                     | None       | None       | None       | None       |
| 1280KB                     | (9) 41256K | None       | None       | None       |
| 1536KB                     | (9) 41256K | (9) 41256K | None       | None       |
| 1792KB                     | (9) 41256K | (9) 41256K | (9) 41256K | None       |
| 2048KB                     | (9) 41256K | (9) 41256K | (9) 41256K | (9) 41256K |

| CONVENTIONAL MEMORY CONFIGURATION |       |       |       |
|-----------------------------------|-------|-------|-------|
| Size                              | SW1/2 | SW1/3 | SW1/4 |
| 256KB                             | Off   | On    | On    |
| 320KB                             | Off   | On    | Off   |
| 384KB                             | Off   | Off   | On    |
| 448KB                             | Off   | Off   | Off   |
| 512KB                             | On    | On    | On    |
| 576KB                             | On    | On    | Off   |
| 640KB                             | On    | Off   | On    |

| BASE I/O ADDRESS SELECTION |       |       |       |       |
|----------------------------|-------|-------|-------|-------|
| Setting                    | SW1/5 | SW1/6 | SW1/7 | SW1/8 |
| 208h                       | On    | On    | On    | On    |
| 209h                       | On    | On    | On    | On    |
| 218h                       | On    | On    | On    | Off   |
| 219h                       | On    | On    | On    | Off   |
| 258h                       | On    | Off   | On    | Off   |
| 259h                       | On    | Off   | On    | Off   |
| 268h                       | On    | Off   | Off   | On    |
| 269h                       | On    | Off   | Off   | On    |
| 2Aeh                       | Off   | On    | Off   | On    |
| 2A9h                       | Off   | On    | Off   | On    |
| 2B8h                       | Off   | On    | Off   | Off   |
| 2B9h                       | Off   | On    | Off   | Off   |
| 2E8h                       | Off   | Off   | Off   | On    |
| 2E9h                       | Off   | Off   | Off   | On    |