


DECISION COMPUTER INTERNATIONAL CO., LTD.

PCCOM 8-BIT ISA 4-PORT RS-232

Card Type	Serial
Chipset	Unidentified
I/O Options	Serial ports (4 RS-232)
Data Bus	8-bit ISA

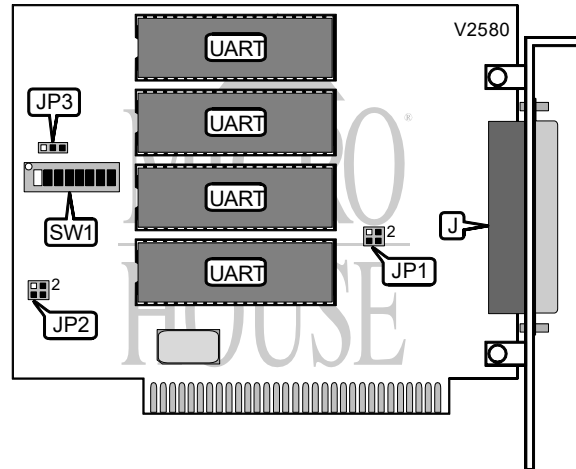

CONNECTIONS	
Function	Label
Serial ports via DB-37 connector	J
Note: Standard DB-25 serial ports are provided on an included adapter cable.	

USER CONFIGURABLE SETTINGS		
Setting	Label	Position
Bus speed is less than 16MHz	JP1	Pins 1 & 3 closed
Bus speed is 16MHz or greater	JP1	Pins 2 & 4 closed
Normal operation	JP3	Pins 1 & 2 closed
PC-MOS/386 mode	JP3	Pins 2 & 3 closed

SERIAL PORT ADDRESSES/INTERRUPTS						
Option	Port 1	IRQ	Port 2	IRQ	Port 3	Port 4
1	3F8h (COM1:)	4	2F8h (COM2:)	3	1B0h	1B8h
2	3F8h (COM1:)	4	2F8h (COM2:)	3	2B0h	2B8h
3	1A0h	SW1	1A8h	SW1	1B0h	1B8h
4	2A0h	SW1	2A8h	SW1	2B0h	2B8h
Note: The interrupt for port 3 and port 4 is always set by SW1.						

SERIAL PORT ADDRESSES/INTERRUPTS (CON'T)			
Option	JP2	SW1/7	SW1/8
1	Pins 1 & 2, 3 & 4 closed	On	Off
2	Pins 1 & 2, 3 & 4 closed	On	On
3	Open	Off	Off
4	Open	Off	On

Continued on next page. . .

DECISION COMPUTER INTERNATIONAL CO., LTD.
PCCOM 8-BIT ISA 4-PORT RS-232

. . . continued from previous page

INTERRUPT						
Setting	SW1/1	SW1/2	SW1/3	SW1/4	SW1/5	SW1/6
IRQ2	On	Off	Off	Off	Off	Off
IRQ3	Off	On	Off	Off	Off	Off
IRQ4	Off	Off	On	Off	Off	Off
IRQ5	Off	Off	Off	On	Off	Off
IRQ6	Off	Off	Off	Off	On	Off
IRQ7	Off	Off	Off	Off	Off	On