


ASKEY COMPUTER CORPORATION

MDM-DFV1414/A

Card Type	Modem
Chipset	Cirrus Logic
I/O Options	Microphone in, speaker out, voice
Maximum Data Rate	14.4Kbps
Maximum Fax Rate	14.4Kbps
Data Bus	8-bit ISA
Fax Class	Class I
Data Modulation	Bell 103A/212A
	ITU-T V.22, V.22bis, V.32, V.32bis
Fax Modulation	ITU-T V.17, V.21CH2, V.27ter, V.29
Error	MNP5, V.42, V.42bis
Correction/Compression	

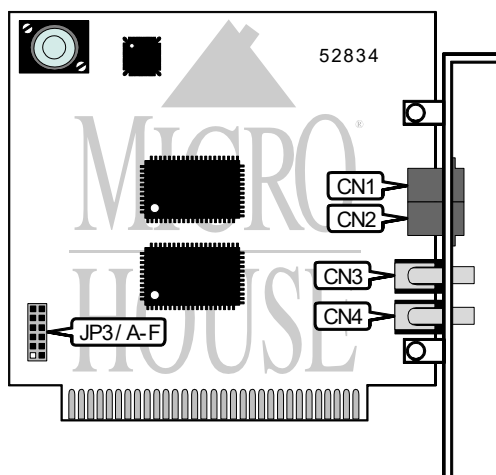

CONNECTIONS			
Function	Label	Function	Label
Line in	CN1	Speaker out	CN3
Line out	CN2	Microphone in	CN4

SERIAL PORT ADDRESS SELECTION		
Setting	JP3/A	JP3/B
3F8h (COM1:)	Closed	Closed
2F8h (COM2:)	Open	Closed
3E8h (COM3:)	Closed	Open
2E8h (COM4:)	Open	Open

INTERRUPT SELECTION				
Setting	JP3/C	JP3/D	JP3/E	JP3/F
IRQ3	Closed	Open	Open	Open
IRQ4	Open	Closed	Open	Open
IRQ5	Open	Open	Closed	Open
IRQ7	Open	Open	Open	Closed

SUPPORTED STANDARD COMMANDS
The command set is unidentified.