


CISCO SYSTEMS, INC. CISCOPRO CPA202

Card Type	ISDN TA
Chipset	Unidentified
ISDN Transfer Rate	64Kbps x 2
ISDN Protocol	Unidentified
Switch Type	Unidentified
Data Bus	16-bit ISA

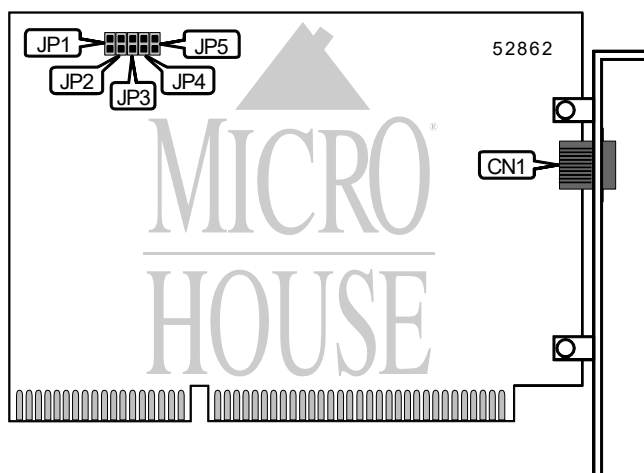

CONNECTIONS	
Function	Label
ISDN U line out	CN1

USER CONFIGURABLE SETTINGS		
Setting	Label	Position
í Factory configured - do not alter	JP5	Closed

BASE I/O ADDRESS SELECTION		
Setting	JP1	JP2
í 390h	Closed	Closed
398h	Open	Closed
3A0h	Closed	Open
3A8h	Open	Open

INTERRUPT SELECTION		
Setting	JP3	JP4
IRQ2/9	Open	Open
IRQ5	Closed	Open
IRQ10	Open	Closed
í IRQ11	Closed	Closed

SUPPORTED STANDARD COMMANDS
The command set is unidentified.