


PROLINK COMPUTER, INC.
M V G A - C L 5 4 4 X P I I

Card Type	Video
Video Chip Set	Cirrus Logic
Maximum Video Memory	2MB DRAM (EDO)
Video Types Supported	XVGA
Highest Resolution Supported	1280 x 1024
Data Bus	32-bit PCI

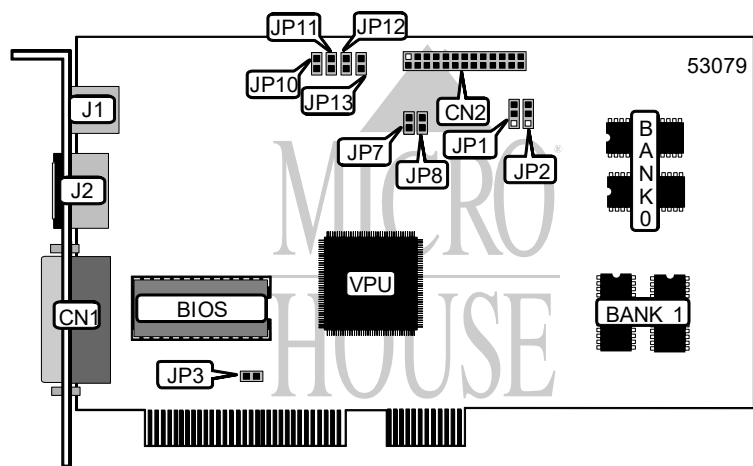

CONNECTIONS			
Function	Label	Function	Label
15-pin analog video port	CN1	Composite video out	J1
Feature connector	CN2	S-video out	J2

FEATURE CONNECTOR CONFIGURATION		
Setting	JP1	JP2
í Normal	Pins 2 & 3 closed	Pins 2 & 3 closed
Connected to TV card (PX4072+)	Pins 1 & 2 closed	Pins 1 & 2 closed

DDC2B CONFIGURATION		
Setting	JP7	JP8
í Disabled	Open	Open
Enabled	Closed	Closed

USER CONFIGURABLE SETTINGS		
Function	Label	Position
í INTA enabled	JP3	Closed
INTA disabled	JP3	Open
í NTSC mode enabled	JP10	Open
PAL mode enabled	JP10	Closed
í Underscan mode enabled	JP11	Open
Overscan mode enabled	JP11	Closed

Continued on next page . . .

PROLINK COMPUTER, INC.
M V G A - C L 5 4 4 X P I I

. . . continued from previous page

ANTI-FLICKER MODE SELECTION		
Setting	JP12	JP13
0:1:0 overaging	Open	Open
1:3:1 overaging	Open	Closed
1:2:1 overaging	Closed	Open
1:1:0 overaging	Closed	Closed

DRAM CONFIGURATION
Exact configuration is unidentified.