


PROLINK COMPUTER, INC.
PV-CL546XP II

Card Type	Video
Video Chip Set	Cirrus Logic
Maximum Video Memory	4MB RDRAM
Video Types Supported	XVGA
Highest Resolution Supported	1600 x 1200
Data Bus	32-bit PCI

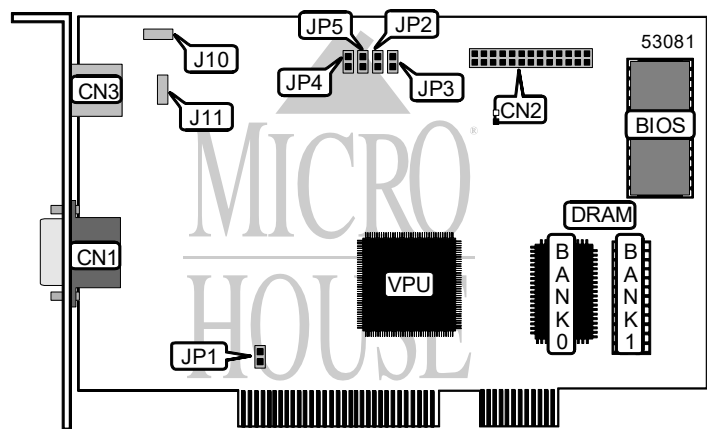

CONNECTIONS			
Function	Label	Function	Label
15-pin analog video port	CN1	Unidentified	J10
Feature connector	CN2	Unidentified	J11
Video in	CN3		

USER CONFIGURABLE SETTINGS		
Function	Label	Position
INTA disabled	JP1	Open
INTA enabled	JP1	Closed
NTSC mode enabled	JP4	Open
PAL mode enabled	JP4	Closed
Underscan mode enabled	JP5	Open
Overscan mode enabled	JP5	Closed

ANTI-FLICKER MODE SELECTION		
Setting	JP2	JP3
0:1:0 overaging	Open	Open
1:3:1 overaging	Open	Closed
1:2:1 overaging	Closed	Open
1:1:0 overaging	Closed	Closed

DRAM CONFIGURATION		
Size	Bank 0	Bank 1
2MB	2MB	None
4MB	2MB	2MB

Note: The size of memory chips is unidentified.