


COLORGRAPHIC COMMUNICATIONS CORPORATION

PRO LIGHTNING V+ PCI

Card Type	Video card
Video Chipset	S3 Trio64V+
Maximum Video Memory	4MB DRAM (2MB per port)
I/O Options	Feature connectors (2), VGA out (2)
Data Bus	32-bit PCI
Video Types Supported	XVGA
Highest Resolution Supported	1280 x 1024

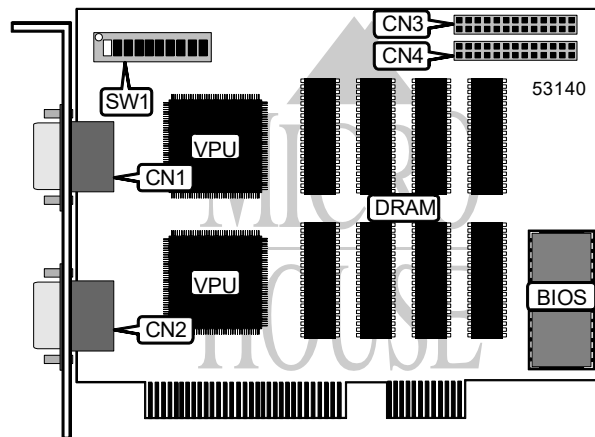

CONNECTIONS			
Function	Label	Function	Label
15-pin analog video port 2	CN1	Feature connector 2	CN3
15-pin analog video port 1	CN2	Feature connector 1	CN4

USER CONFIGURABLE SETTINGS		
Setting	Label	Position
í Factory configured - do not alter	SW1/5	Unidentified
í Factory configured - do not alter	SW1/6	Unidentified
í Factory configured - do not alter	SW1/7	Unidentified
í Factory configured - do not alter	SW1/8	Unidentified
í Factory configured - do not alter	SW1/9	Unidentified
í Factory configured - do not alter	SW1/10	Unidentified

BASE I/O ADDRESS SELECTION			
Primary	Secondary	SW1/1	SW1/2
32Ch	328h	On	On
33Ch	338h	On	Off
34Ch	348h	Off	On
35Ch	358h	Off	Off

BOARD NUMBER SELECTION		
Setting	SW1/3	SW1/4
1	On	On
2	Off	On
3	On	Off
4	Off	Off