


COLORGRAPHIC COMMUNICATIONS CORPORATION

QUAD PRO LIGHTNING V+ PCI

Card Type	Video card
Video Chipset	S3 Trio64V+
Maximum Video Memory	8MB DRAM (2MB per port)
I/O Options	Feature connector, VGA out (4)
Data Bus	32-bit PCI
Video Types Supported	XVGA
Highest Resolution Supported	1280 x 1024

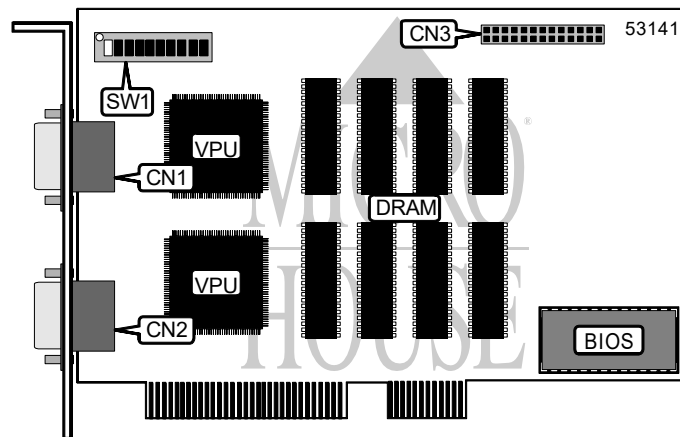

CONNECTIONS			
Function	Label	Function	Label
Video ports 2 and 4	CN1	Feature connector	CN3
Video ports 1 and 3	CN2		
Note: Standard 15-pin analog video connectors are provided on included adapter cables.			

USER CONFIGURABLE SETTINGS		
Setting	Label	Position
í Factory configured - do not alter	SW1/7	Unidentified
í Factory configured - do not alter	SW1/8	Unidentified
í Factory configured - do not alter	SW1/9	Unidentified
í Factory configured - do not alter	SW1/10	Unidentified

BASE I/O ADDRESS SELECTION			
Primary	Secondary	SW1/1	SW1/2
32Ch	328h	On	On
33Ch	338h	On	Off
34Ch	348h	Off	On
35Ch	358h	Off	Off

BOARD NUMBER SELECTION				
Setting	SW1/3	SW1/4	SW1/5	SW1/6
1	On	On	Off	On
2	On	Off	Off	Off