


# COROLLARY, INC. 8 X 4 M C

<b>Card Type</b>	Serial
<b>Processor</b>	80188
<b>Processor Speed</b>	10MHz
<b>Chipset</b>	8530
<b>Maximum Onboard Memory</b>	64KB SRAM
<b>I/O Options</b>	Serial ports (32)
<b>Data Bus</b>	MCA
<b>Card Size</b>	Full-height, full-length

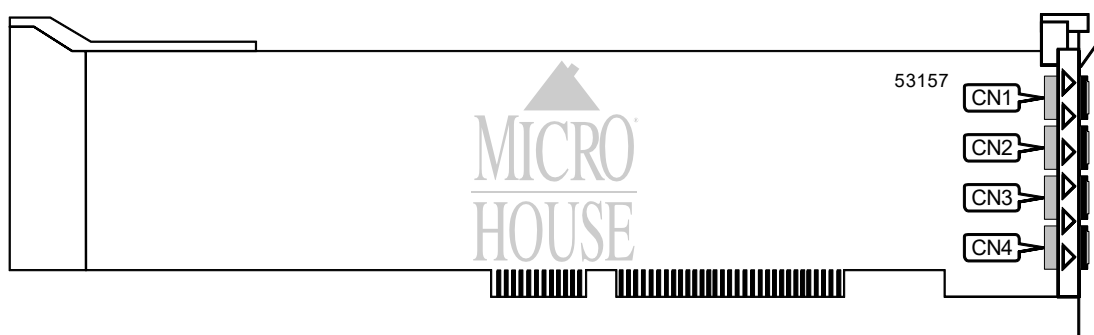

CONNECTIONS			
Function	Label	Function	Label
Serial ports 1-8	CN1	Serial ports 17-24	CN3
Serial ports 9-16	CN2	Serial ports 25-32	CN4
Note: Standard RJ-11 serial ports are provided on external expansion boxes.			

DIAGNOSTIC LED(S)			
LED	Color	Status	Condition
LED	Red	On	Power is on
LED	Red	Blinking	Error has occurred
LED	Red	Off	Power is off
Note: The location of the LED is unidentified.			