


# DIAMOND MULTIMEDIA SYSTEMS, INC.

## FIRE GL 2000

Card Type	Graphics adapter
Video Chip Set	3DLabs
Maximum Video Memory	8MB VRAM, 16MB DRAM
Video Types Supported	VGA, XVGA
Highest Resolution Supported	1600 x 1200
Data Bus	32-bit PCI

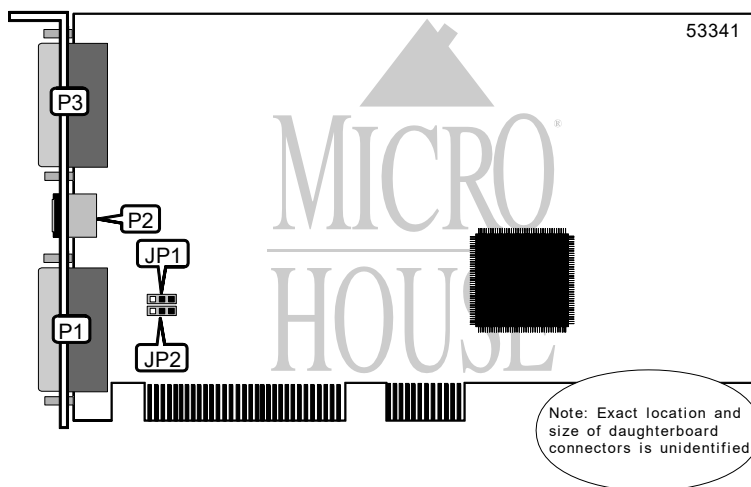

CONNECTIONS			
Function	Label	Function	Label
15-pin analog video port (primary)	P1	15-pin analog video port (secondary)	P3
VGA input - external	P2		

USER CONFIGURABLE SETTINGS		
Function	Label	Position
Windows compatibility - enabled	JP1	Pins 1 & 2 closed
Windows compatibility - disabled	JP1	Pins 2 & 3 closed
On-board VGA - enabled	JP2	Pins 1 & 2 closed
On-board VGA - disabled	JP2	Pins 2 & 3 closed

VIDEO MEMORY UPGRADE CONFIGURATION		
Total	DISPLAY/VRAM	Z-BUFFER/EDO DRAM
16MB	8MB	8MB
24MB	8MB	16MB
Note: The Fire GL 2000 can be upgraded with memory Upgrade Modules for 8MB of VRAM and 8MB/16MB of EDO DRAM as shown above. These modules are installed piggyback onto the Fire GL 2000 board.		