


MEDIA VISION TECHNOLOGY, INC.

PRO AUDIO SPECTRUM REV.D (650-0044-01)

| | |
|------------------------|---|
| Card Type | Sound card |
| Chip Set | Unidentified |
| Maximum Onboard Memory | Unidentified |
| I/O Options | Game/MIDI port, CD-ROM audio in (2), SCSI interface, microphone in, stereo line in, stereo line out, PC speaker connector |
| Data Bus | 16-bit ISA |

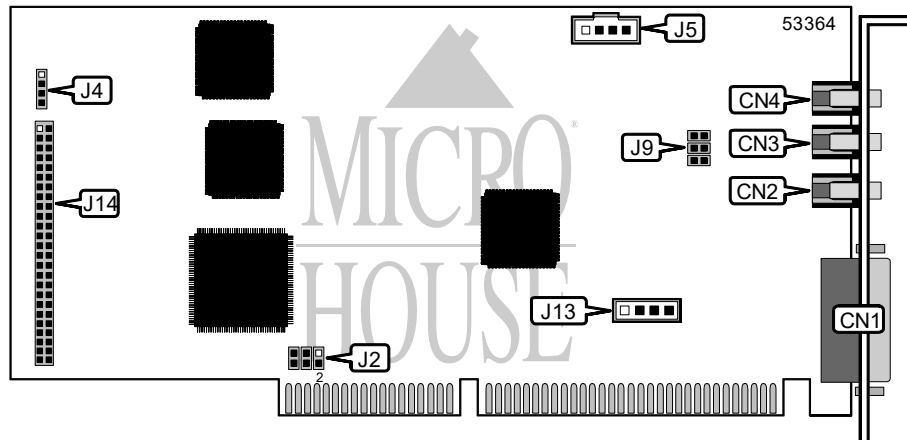

| CONNECTIONS | | | |
|-----------------|-------|------------------------|-------|
| Function | Label | Function | Label |
| Game/MIDI port | CN1 | PC speaker connector | J4 |
| Microphone in | CN2 | Audio in - CD-ROM | J5 |
| Stereo line out | CN3 | Aux. Audio in - CD-ROM | J13 |
| Stereo line in | CN4 | 50-pin SCSI connector | J14 |

| USER CONFIGURABLE SETTINGS | | |
|-------------------------------------|-------|--------------|
| Function | Label | Position |
| í Factory configured - do not alter | J9 | Unidentified |

| BOARD ID SELECTION | | | |
|---|---------------|---------------|---------------|
| Setting | J2/pins 1 & 2 | J2/pins 3 & 4 | J2/pins 5 & 6 |
| í 0 | Open | Open | Open |
| 1 | Closed | Open | Open |
| 2 | Open | Closed | Open |
| 3 | Closed | Closed | Open |
| 4 | Open | Open | Closed |
| Note: When ID 4 is selected, the base I/O address is forced to 388h. For all other ID's the software scans for available settings. Refer to the manufacturer's documentation for possible settings. | | | |