


DOLPHIN PERIPHERALS, LLC.

FASTISA-4011

Card Type	Parallel card
Chip Set	SUN
Maximum Onboard Memory	None
I/O Options	Parallel ports (2)
Data Bus	16-bit ISA
Floppy drives supported	None

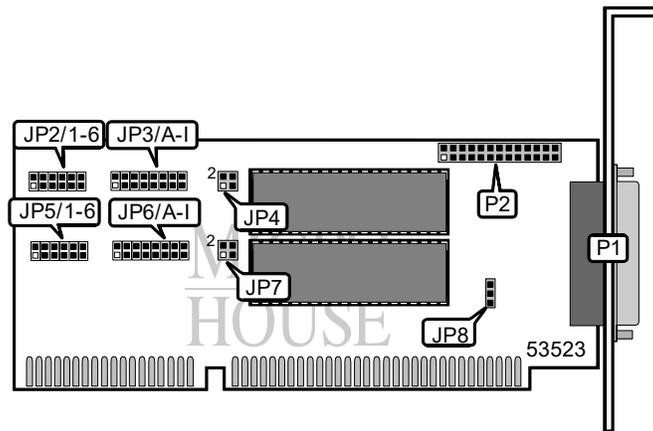

CONNECTIONS				
Function	Location	Function	Location	
25-pin parallel port 1	P1	26-pin parallel port 2	P2	

USER CONFIGURABLE SETTINGS			
Setting	Label	Position	
Hi/Low mode – low enabled	JP8	Pins 2 & 3 closed	
Hi/low mode – hi enabled	JP8	Pins 1 & 2 closed	

PARALLEL PORT CONFIGURATION		
Setting	JP4	JP7
Unidirectional	Pins 3 & 4 closed	Pins 3 & 4 closed
Bi - directional	Pins 1 & 2 closed	Pins 1 & 2 closed

PARALLEL PORT 1 ADDRESS SELECTION						
LPT	JP2/1	JP2/2	JP2/3	JP2/4	JP2/5	JP2/6
LPT1(3BCh)	Closed	Open	Open	Open	Open	Open
LPT2(378h)	Open	Closed	Open	Open	Open	Open
LPT3(278h)	Open	Open	Closed	Open	Open	Open
LPT4(268h)	Open	Open	Open	Closed	Open	Open
LPT5(27Ch)	Open	Open	Open	Open	Closed	Open
LPT6(26Ch)	Open	Open	Open	Open	Open	Closed

PARALLEL PORT 2 ADDRESS SELECTION						
LPT	JP5/1	JP5/2	JP5/3	JP5/4	JP5/5	JP5/6
LPT1(3BCh)	Closed	Open	Open	Open	Open	Open
LPT2(378h)	Open	Closed	Open	Open	Open	Open
LPT3(278h)	Open	Open	Closed	Open	Open	Open
LPT4(268h)	Open	Open	Open	Closed	Open	Open
LPT5(27Ch)	Open	Open	Open	Open	Closed	Open
LPT6(26Ch)	Open	Open	Open	Open	Open	Closed

Continued on next page. . .

